


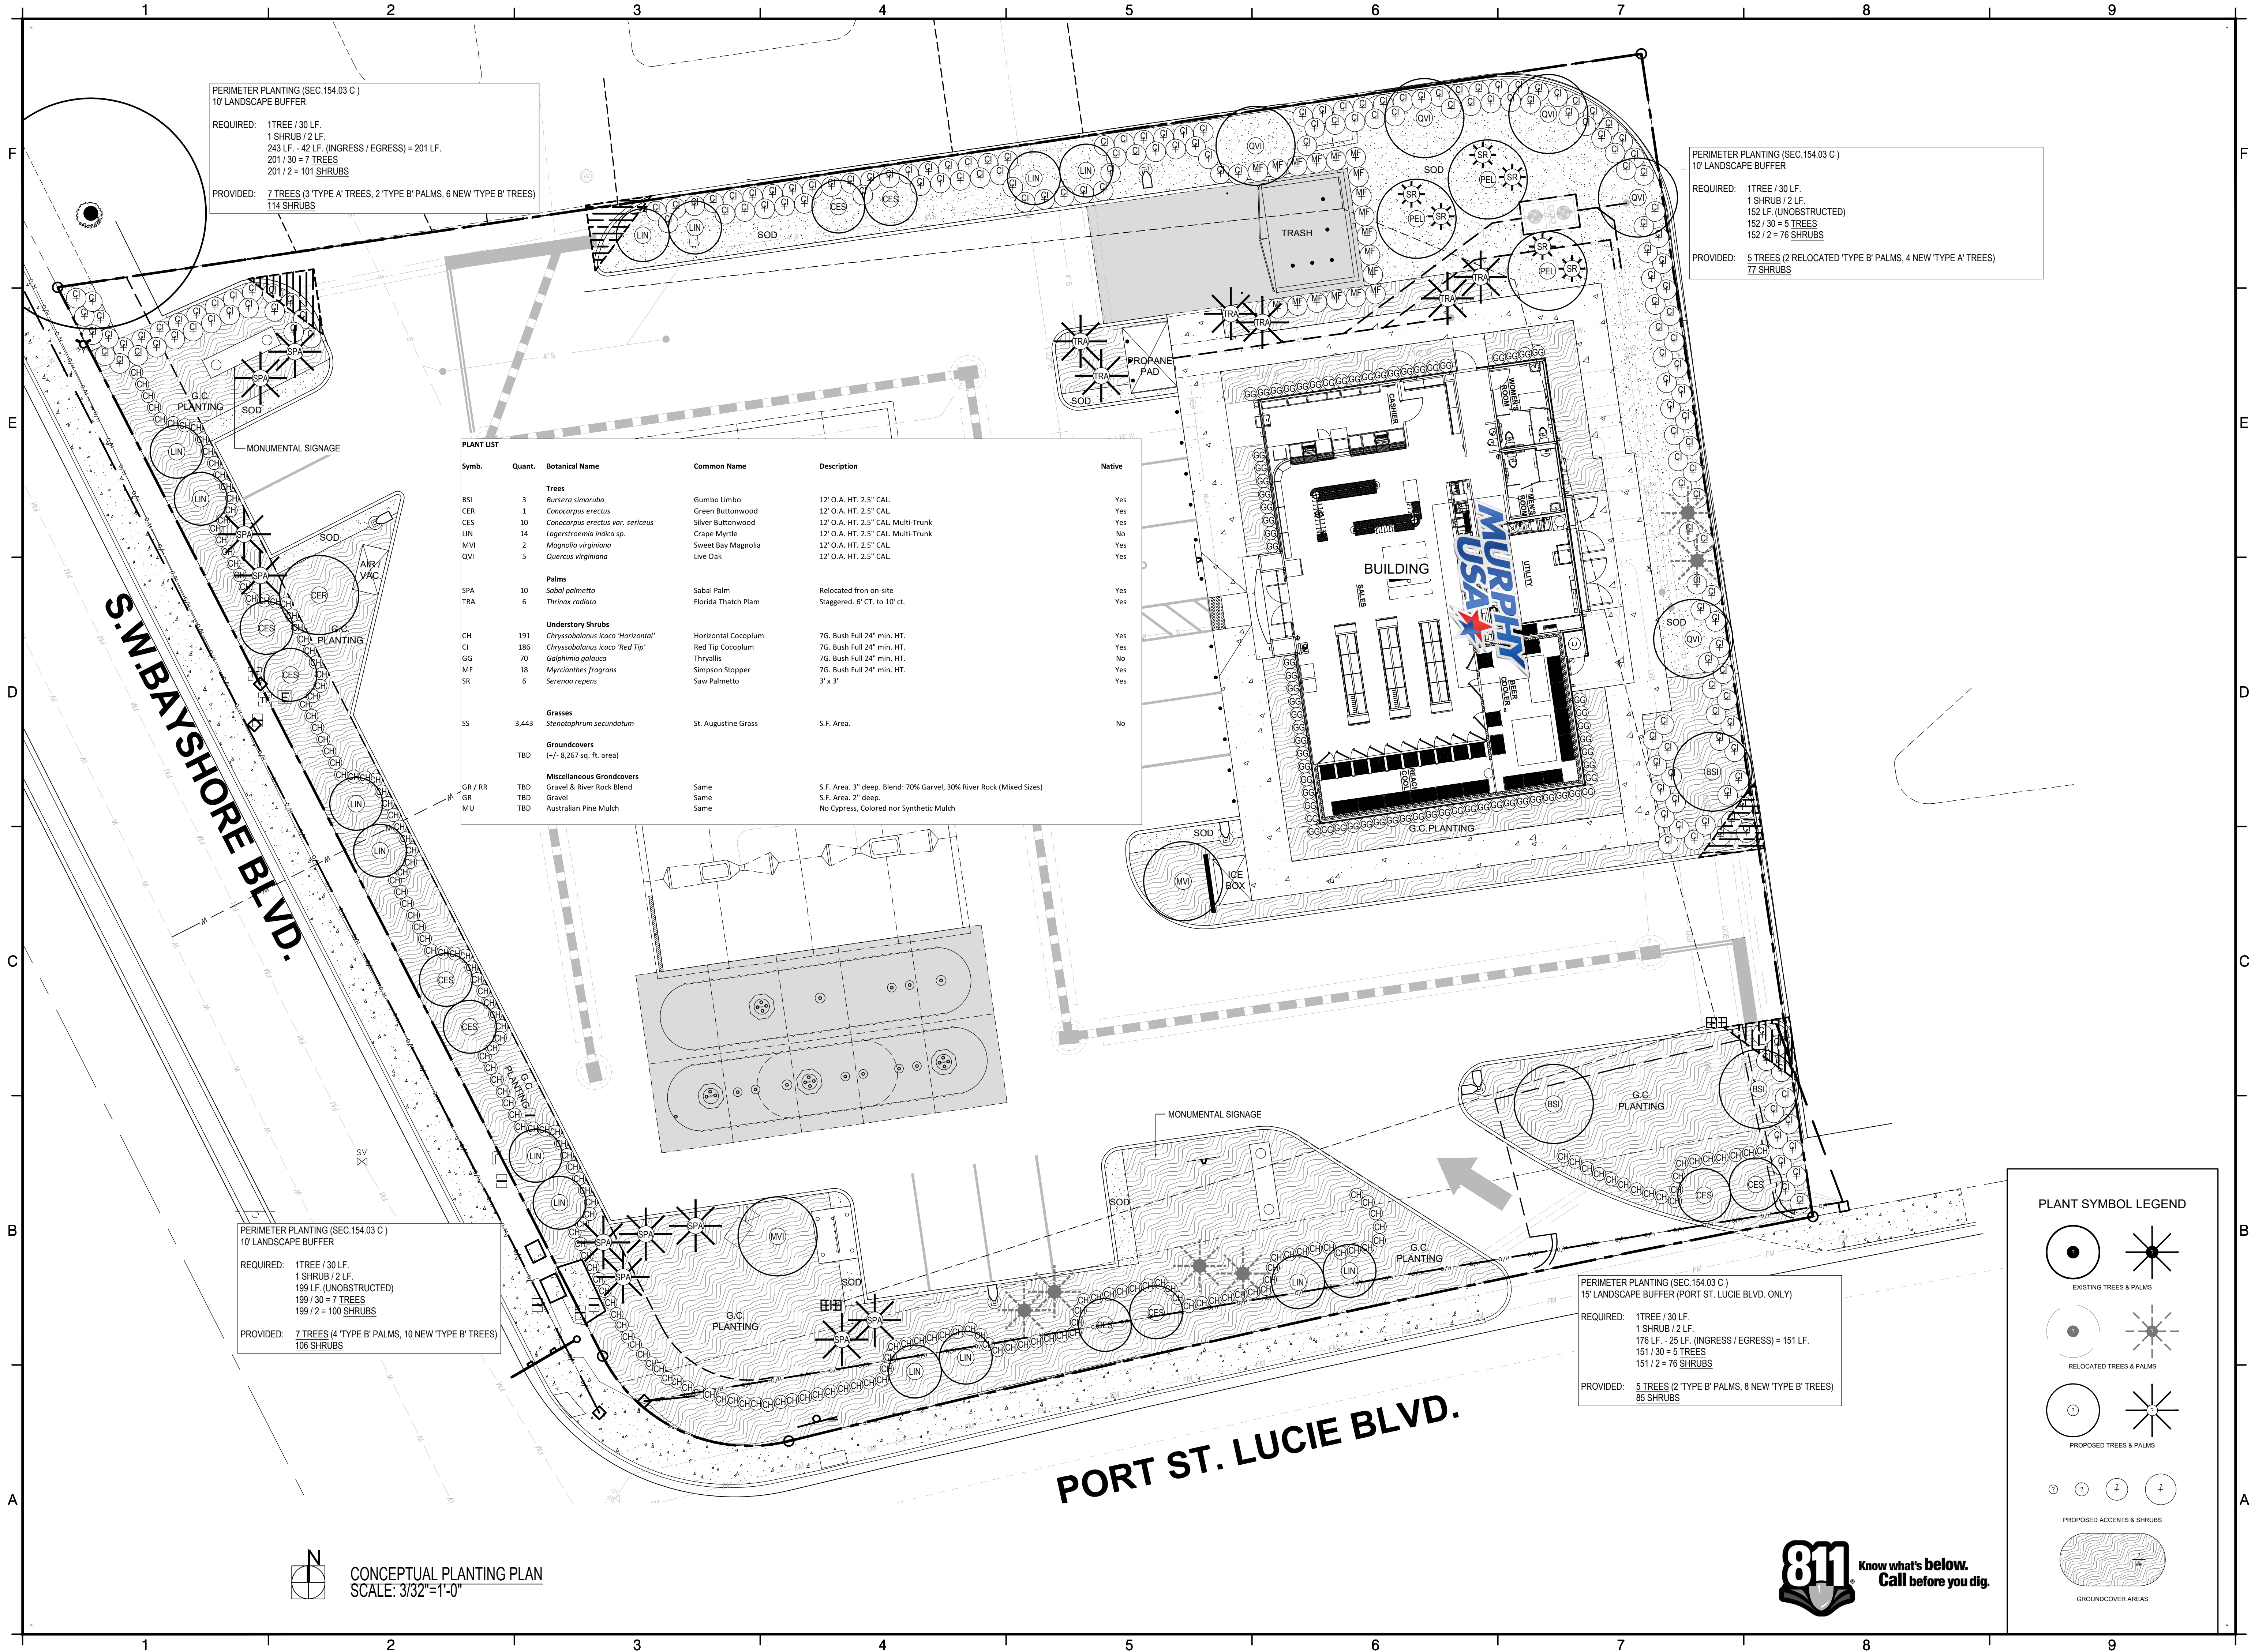

PERIMETER PLANTING (SEC.154.03 C)
10' LANDSCAPE BUFFER

REQUIRED: 1 TREE / 30 LF.
1 SHRUB / 2 LF.
243 LF. - 42 LF. (INGRESS / EGRESS) = 201 LF.
201 / 30 = 7 TREES
201 / 2 = 101 SHRUBS

PROVIDED: 7 TREES (3 TYPE A' TREES, 2 TYPE B' PALMS, 6 NEW TYPE B' TREES)
114 SHRUBS

PERIMETER PLANTING (SEC.154.03 C)
10' LANDSCAPE BUFFER

REQUIRED: 1 TREE / 30 LF.
1 SHRUB / 2 LF.
152 LF. (UNOBSTRUCTED)
152 / 30 = 5 TREES
152 / 2 = 76 SHRUBS

PROVIDED: 5 TREES (2 RELOCATED TYPE B' PALMS, 4 NEW TYPE A' TREES)
77 SHRUBS

PLANT LIST					
Symb.	Quant.	Botanical Name	Common Name	Description	Native
Trees					
BSI	3	<i>Bursera simaruba</i>	Gumbo Limbo	12' O.A. HT. 2.5" CAL	Yes
CER	1	<i>Conocarpus erectus</i>	Green Buttonwood	12' O.A. HT. 2.5" CAL	Yes
CES	10	<i>Conocarpus erectus</i> var. <i>sericeus</i>	Silver Buttonwood	12' O.A. HT. 2.5" CAL Multi-Trunk	Yes
LIN	14	<i>Lagerstroemia indica</i> sp.	Crape Myrtle	12' O.A. HT. 2.5" CAL Multi-Trunk	No
MVI	2	<i>Magnolia virginiana</i>	Sweet Bay Magnolia	12' O.A. HT. 2.5" CAL	Yes
QVI	5	<i>Quercus virginiana</i>	Live Oak	12' O.A. HT. 2.5" CAL	Yes
Palms					
SPA	10	<i>Sabal palmetto</i>	Sabal Palm	Relocated on on-site	Yes
TRA	6	<i>Thrinax radiata</i>	Florida Thatch Palm	Staggered, 6' CT. to 10' ct.	Yes
Understory Shrubs					
CH	191	<i>Chrysobalanus icaco</i> "Horizontal"	Horizontal Cocoplum	7G. Bush Full 24" min. HT.	Yes
CI	186	<i>Chrysobalanus icaco</i> "Red Tip"	Red Tip Cocoplum	7G. Bush Full 24" min. HT.	Yes
GG	70	<i>Galphimia galauca</i>	Thryallis	7G. Bush Full 24" min. HT.	No
MF	18	<i>Myrcianthes fragrans</i>	Simpson Stopper	7G. Bush Full 24" min. HT.	Yes
SR	6	<i>Serenao repens</i>	Saw Palmetto	3' x 3'	Yes
Grasses					
SS	3,443	<i>Stenotaphrum secundatum</i>	St. Augustine Grass	S.F. Area.	No
Groundcovers					
TBD		(+/- 8,267 sq. ft. area)			
Miscellaneous Groundcovers					
GR / RR	TBD	Gravel & River Rock Blend	Same	S.F. Area. 3" deep. Blend: 70% Gravel, 30% River Rock (Mixed Sizes)	
TBD		Gravel	Same	S.F. Area. 2" deep.	
MU	TBD	Australian Pine Mulch	Same	No Cypress, Colored nor Synthetic Mulch	

PERIMETER PLANTING (SEC.154.03 C)
10' LANDSCAPE BUFFER

REQUIRED: 1 TREE / 30 LF.
1 SHRUB / 2 LF.
199 LF. (UNOBSTRUCTED)
199 / 30 = 7 TREES
199 / 2 = 100 SHRUBS

PROVIDED: 7 TREES (4 TYPE B' PALMS, 10 NEW TYPE B' TREES)
106 SHRUBS

PERIMETER PLANTING (SEC.154.03 C)
15' LANDSCAPE BUFFER (PORT ST. LUCIE BLVD. ONLY)

REQUIRED: 1 TREE / 30 LF.
1 SHRUB / 2 LF.
176 LF. - 25 LF. (INGRESS / EGRESS) = 151 LF.
151 / 30 = 5 TREES
151 / 2 = 76 SHRUBS

PROVIDED: 5 TREES (2 TYPE B' PALMS, 8 NEW TYPE B' TREES)
85 SHRUBS

PLANT SYMBOL LEGEND

EXISTING TREES & PALMS

RELOCATED TREES & PALMS

PROPOSED TREES & PALMS

PROPOSED ACCENTS & SHRUBS

GROUNDCOVER AREAS

N
CONCEPTUAL PLANTING PLAN
SCALE: 3/32"=1'-0"



MAKwork

LANDSCAPE ARCHITECTURE ARCHITECTURE
1215 SW 20TH STREET MIAMI FL 33145
T: 305.322.2896 F: 305.860.5984

COPYRIGHT©MAKWORK, INC. ALL RIGHTS RESERVED. THESE DRAWINGS AND SPECIFICATIONS ARE PREPARED BY MAKWORK, INC. AND ARE THE PROPERTY OF MAKWORK, INC. NO PART OF THESE DRAWINGS OR SPECIFICATIONS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF MAKWORK, INC. ANY VIOLATION OF THIS AGREEMENT WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.

PROJECT AND OWNER
MURPHY USA (NTI)

LANDSCAPE DRAWINGS
299 SW PORT ST. LUCIE BLVD.
PORT ST. LUCIE, FL 34984

CONSULTANTS

SEAL

MARSH C. KRIPLEN
LIC. NO LA6667007

PROJECT NO. 2024-05
DESIGNED BY
DRAWN BY
CHECKED BY
DATE 06/03/2024

ISSUED FOR:

DRAWING SCALE
3/32"=1'-0"

DRAWING TITLE
CONCEPTUAL LANDSCAPE PLAN

DRAWING NUMBER
CLP