

Landscape Calculations

Regional Park - Perimeter Landscaping:

One (1) Canopy Tree per 30 If Perimeter (3,951 / 30 = 132 Trees)

<u>Total Perimeter Trees Required</u> = 125 Canopy Trees Total Perimeter Trees Provided = 148 Trees

Perimeter Shrubs:

One (1) Shrub per 2 If Perimeter (3,951 / 2 = 1,976 Shrubs)

Total Perimeter Shrubs Required = 1,869
Total Perimeter Shrubs Provided = 2,020

GENERAL LANDSCAPE NOTES:

1. AT LEAST % OF ALL REQUIRED TREES SHALL BE OF A NATIVE SPECIES.

2. ALL PLANT MATERIAL TO BE FLORIDA NO. 1 OR BETTER.

3. ALL LANDSCAPE & SOD AREAS TO BE IRRIGATED BY AN AUTOMATED SYSTEM

4. AT PROVIDES 100% COVERAGE WITH 100% OVERLAP WITH A MINIMUM D.U. OF .70.

5.LANDSCAPING AT INTERSECTION AND CORNERS COMPLIES WITH SECTION 158.204 OF THE PORT ST LUCIE CODE OF ORDINANCES TO PROVIDE A CLEAR SIGHT ZONE BETWEEN 2' - 6'

ABOVE THE FINAL ROAD CROWN ELEVATION. ALL HEDGES AND SHRUBS WITH IN THE 25' SIGHT TRIANGLE WILL BE MAINTAINED AT A HEIGHT NO HIGHER THAN 2' ABOVE THE CROWN ELEVATION OF THE ROAD. IN ADDITION,

THE FOLIAGE LINE ANY TREE WITHIN THE 25' SIGHT TRIANGLE

WILL MAINTAINED AT A HEIGHT OF NO LESS THAN 6' ABOVE THE ROAD CROWN.

6.EXISTING LANDSCAPE MATERIAL NOTED FOR RELOCATION MAY BE SUBSTITUTED WITH NEW PLANTING IF CONSTRUCTION SCHEDULE INHIBITS RELOCATION.

PSLUSD Notes for Landscape Plan

- 1. NO LANDSCAPING SHALL BE PLANTED IN A MANNER THAT WOULD ADVERSLY AFFECT UTILITY EASEMENTS. LANDSCAPING SHALL BE IN COMPLIANCE WITH CHAPTER 154 OF THE CITY OF PORT SAINT LUCIE CODE OF ORDINANCES, PSLUSD TECHNICAL SPECIFICATIONS AND POLICIES.
- 2. ALL LANDSCAPING WITHIN CITY UTILITY EASEMENTS SHALL COMPLY WITH PSLUSD TECHNICAL SPECIFICATIONS, POLICIES, AND CODES.
- 3. ALL LANDSCAPING SHALL MEET THE LATEST PSLUSD LANDSCAPE POLICY AND SHALL NOT BE PLACED IN A MANNER THAT WOULD CREATE CONFLICTS WITH THE INTENDED OPERATION AND MAINTENANCE OF ANY EXISTING UTILITY.
- 4. TREES SHALL NOT BE PLANTED WITHIN TEN (10) FEET OF ANY PSLUSD UNDERGROUND INFRASTRUCTURE.
- 5. NO LANDSCAPING OTHER THAN SOD GRASSES SHALL BE LOCATED WITHIN 5' OF A PSLUSD APPURTENANCE SUCH AS A WATER METER ASSEMBLY, BACKFLOW DEVICE, FIRE HYDRANT, OR SEWER CLEANOUT, ETC
- 6. ALL TREES LOCATED WITHIN 8' OF ANY HARDSCAPE MATERIAL OR UNDERGROUND UTILITY TO RECEIVE ROOT BARRIER; SEE DETAIL ON SHEET LA-7.

PHASE 1 LIMITS TYP.





Project Team:

Land Planner /

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220

Boynton Beach, FL 33426

Lucido & Associates

701 E Ocean Boulevard Landscape Architect: Stuart, FL 34994

Vero Beach, FL 32960

Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

445 24th Street, Suite 200


Tradition Regional Park

Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116 PSLUD No. 5410

1 OLOD 110. 0+10				
Date	Ву	Description		
05.18.21	PĞ	1st Submittal		
04.06.2022	SAW	Resubmittal		
07.06.2022	SAW	Resubmittal		
07.19.2023	SAW	Resubmittal		
08.30.2023	SAW	Resubmittal		



Thomas P. Lucido

Index of Drawings:

Details & Specifications

Landscape Plan Plant Schedule Landscape Plans


LA-9, LA-10

20-276.17 Tradition Regional Park- Landscape

PLANT SCHEDULE PHASE 1

TREES	QTY	BOTANICAL NAME	COMMON NAME	CONTAINER	HEIGHT	WIDTH	NOTES	NATIVE	CALIPER	
AR	33	Acer rubrum	Red Maple	65G	12` HT	6` SPR	F, SP	Native	4" Caliper	
CE	38	Conocarpus erectus	Green Buttonwood	FG	12` HT	5`W	STD, 4` CT, SP	Native	4" Caliper	
DEL	3	Delonix regia	Royal Poinciana	FG	12`-14` HT	6`W	B&B, STD, SP, F	Non-native	4" Caliper	
IC	9	llex cassine	Dahoon Holly	FG	12` HT	6` SPR	F, SP	Native	•	
LN2	10	Lagerstroemia indica `Natchez`	Natchez` Crape Myrtle	FG	12` HT	6` SPR	ML, SP	Non-native		
QA	41	Quercus virginiana	Southern Live Oak	100G	16` HT	7` SPR	F, SP	Native	4" Caliper	
QV	116	Quercus virginiana	Southern Live Oak	65G	12` HT	6`W	F, SP	Native	4" Caliper	
QV1	9	Quercus virginiana	Southern Live Oak	FG	16` HT	10`-12` Sprd	SGL, CH	Native	6-8"	
RYS	90	Roystonea elata	Florida Royal Palm	FG	8`GW	·	FF, HVY CAL, STR			
SP	194	Sabal palmetto	Sabal Palm	FG	12`-16` HT		SLK, CV, SP, MIX HTS	Native		
SEN	9	Senna polyphylla	Desert Cassia	25G	5`-6` OA		, ,	Non-native		
TI	6	Tabebuia impetiginosa 'lpe'	Purple Trumpet Tree	65G	12` HT	6`W	F, SP, 6` CT	Non-native	2.5" Caliper	
TD	74	Taxodium distichum	Bald Cypress	FG	12` HT	6` SPR	F, SP	Native	,	
WB	3	Wodyetia bifurcata	Foxtail Palm	FG	12`GW		Full Head, Str, Specimen	Non-native		
			. 57.35 5	. •	•		, -u, -p			
SHRUBS	QTY	BOTANICAL NAME	COMMON NAME	CONTAINER	HEIGHT	WIDTH	NOTES	NATIVE	SPACING	
AWB	67	Acalypha wilkesiana `Louisiana Red`	Red Copperleaf	3G	24" HT	24"W	FTB, SP	Non-native	<u> </u>	
ALI	6	Alcantarea imperialis	Imperial Bromeliad	7G	30" OA		SP	Non-native		
ABS	6	Androlepis skinneri	Big Red Bromeliad	7G	30" OA		SP	Non-native		
CCH	56	Chrysobalanus icaco `Horizontalis`	Horizontal Cocoplum	3G	12" HT	12"W	F	Native		
CHR	3,115	Chrysobalanus icaco `Red Tip`	Red Tip Cocoplum	3G	24" HT	18"W	FTB	Native		
CLU	182	Clusia guttifera	Small-Leaf Clusia	15G	5`HT	4`W	FTB			
CES	52	Conocarpus erectus	Green Buttonwood	3G	24" HT	24"W	F	Native		
CEB	126	Conocarpus erectus	Green Buttonwood	7G	48" HT	36" W	F	Native		
GAG	110	Galphimia glauca	Thryalis	3G	24" HT	18"W	F	Non-native		
HAM	70	Hamelia patens	Firebush	3G	36" HT	30"W	FTB	Native		
JAT	12	Jatropha integerrima	Jatropha	15G	4` HT	3`W	STD, SP	Non-native		
PLI	67	Plumbago auriculata `Imperial Blue`	Plumbago	3G	24" HT	24"W	F, SP	Non-native		
ROL	39	Rondeletia leucophylla	Panama Rose `Pink`	3G	24" HT	24"W	FTB, SP	Non-native		
NOL	33	Nondeletta ledeophylla		30	27 111	Z-T VV	1 10, 01	Non-nauve		
SHRUB AREAS	QTY	BOTANICAL NAME	COMMON NAME	CONTAINER	HEIGHT	WIDTH	NOTES	NATIVE		
BIH	159	Bougainvillea x 'Helen Johnson'	Helen Johnson Compact Bougainvillea	3G	18"HT	18"W	F	147 (11 V 🗀		24" o.c.
PSW	329	Pennisetum setaceum 'White'	White Fountain Grass	3G	24" OA	10 00	, E	Non-native		36" o.c.
TRD	505	Tripsacum dactyloides	Fakahatchee Grass	3G	24" OA		r Full	Native		48" o.c.
IND	303	rripsacurr dactyloides	i akanatenee Orass	30	24 OA		i uii	Nauve		40 0.0.
GRASSES	QTY	BOTANICAL NAME	COMMON NAME	CONTAINER	HEIGHT	WIDTH	NOTES	NATIVE		
MUH	1,649	Muhlenbergia capillaris	Pink Muhly	3G	18" OA	VVIDIII	F	INALIVE		24" o.c.
SPB	214	Spartina bakeri	Sand Cordgrass	3G 3G	18" OA		r F	Native		24" o.c.
OI D	۷۱4	Οραιτιπα νακοπ	Caria Coragiass	30	10 07		ı	Manve		∠ ¬ ∪.∪.
GROUND COVERS	QTY	BOTANICAL NAME	COMMON NAME	CONTAINER	HEIGHT	WIDTH	NOTES	NATIVE		
GIF	119	Ficus microcarpa `Green Island`	Green Island Ficus	1G	12"HT	12"W	Full	14/ \		18" o.c.
ILS	730	Ilex vomitoria `Stokes Dwarf`	Dwarf Yaupon	1G 1G	12 TT 12"HT	12 W 12"W	Full	Native		18" o.c.
JUP	100	Juniperus chinensis `Parsonii`	Parsoni Juniper	1G 1G	10" HT	12 W 15" SPR	Full	Non-native		24" o.c.
JOI	100	Juliipelus Giillelisis Falsoliii		10	10 111	IO OF IN	i uli	i Nort-Hally C		∠ 1 0.6.



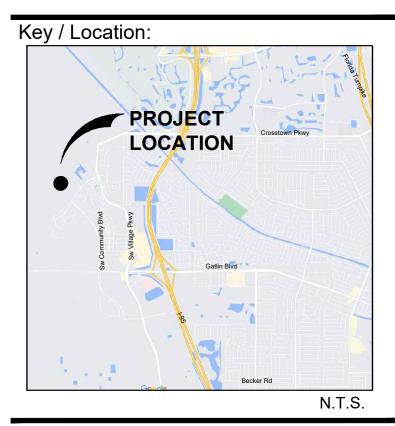

Project Team: Client & Property Owner:

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

Lucido & Associates 701 E Ocean Boulevard Land Planner / Landscape Architect: Stuart, FL 34994

445 24th Street, Suite 200 Vero Beach, FL 32960

Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park

Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116 PSLUD No. 5410

PSLUD No. 5410				
Date	By	Description		
05.18.21	PĞ	1st Submittal		
04.06.2022	SAW	Resubmittal		
07.06.2022	SAW	Resubmittal		
07.19.2023	SAW	Resubmittal		
08.30.2023	SAW	Resubmittal		




Computer File


Thomas P. Lucido

20-276.17 Tradition Regional Park- Landscape

Manager Project Number 20-276.17 Municipal Number P21-116

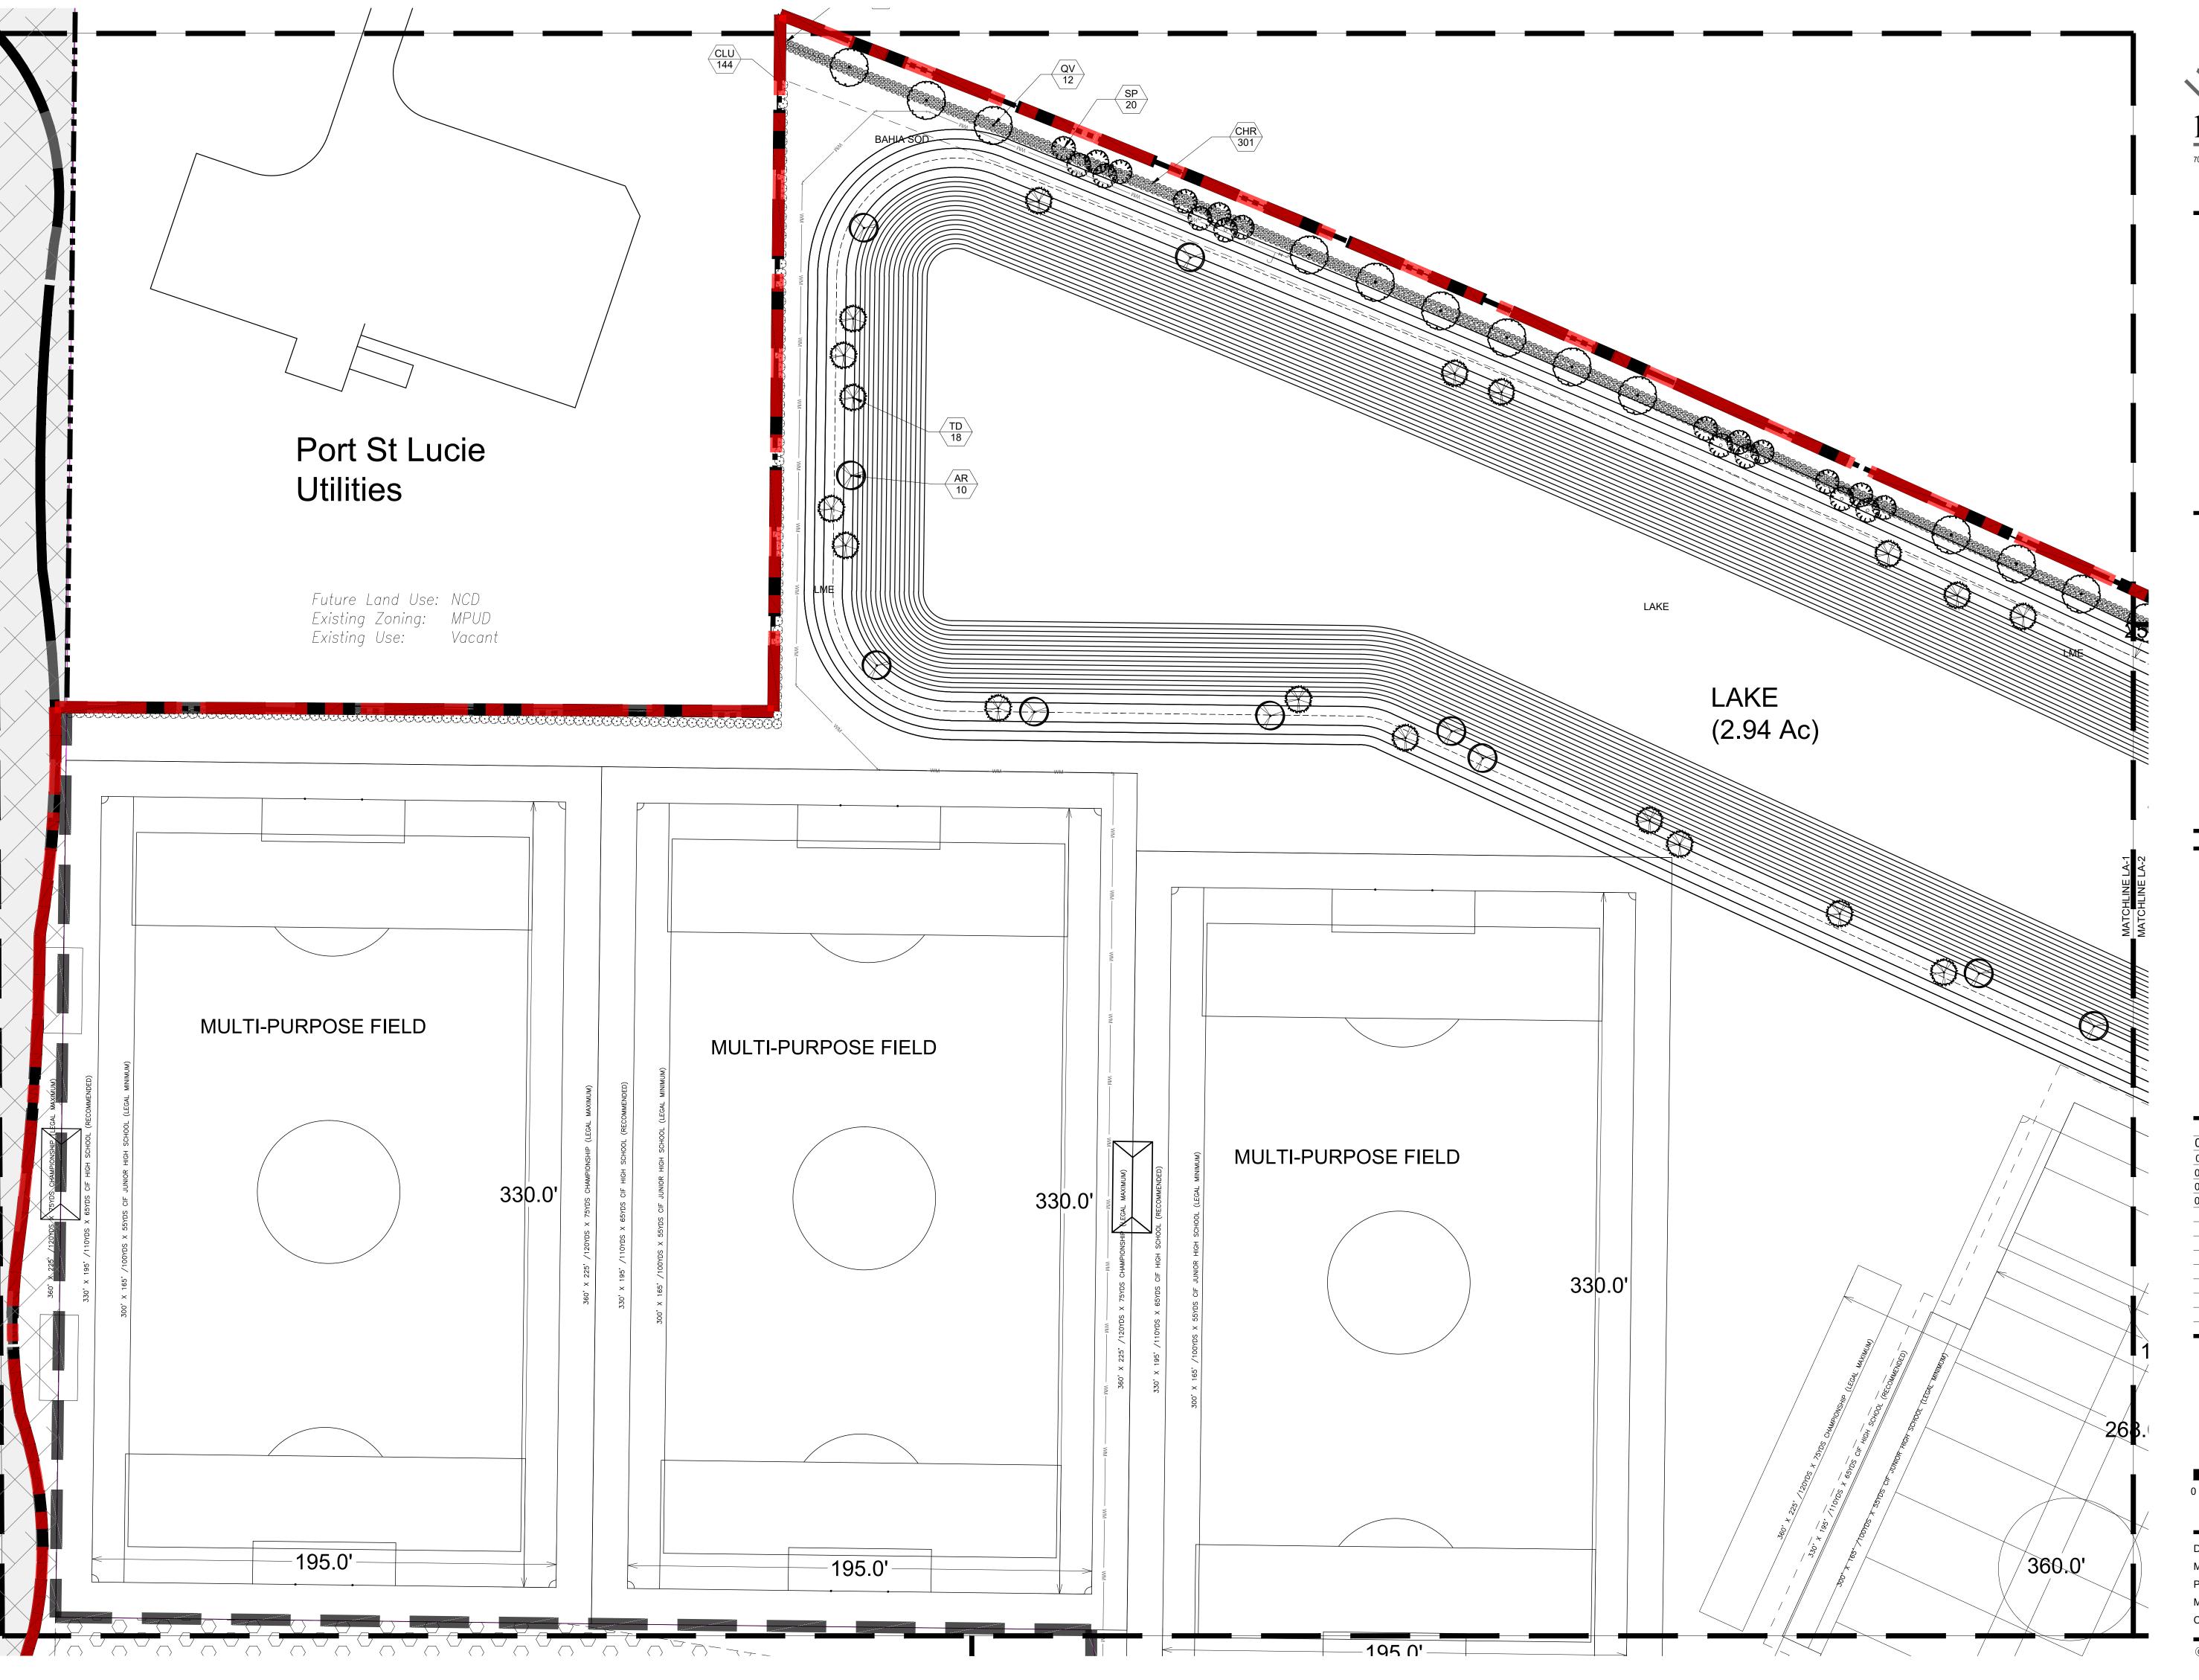



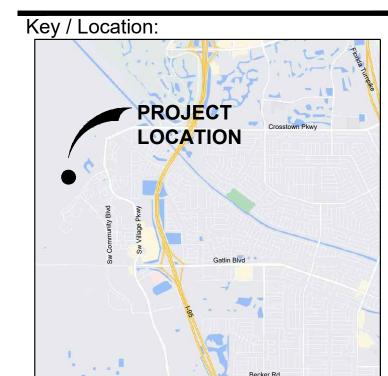

Project Team:

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

N.T.S.

Land Planner / Lucido & Associates
Landscape Architect: 701 E Ocean Boulevard

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960

410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984


Tradition Regional Park

Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116 PSLUD No. 5410

Date	Ву	Description
05.18.21	PĞ	1st Submittal
04.06.22	SAW	Resubmittal
07.06.2022	SAW	Resubmittal
07.19.2023	SAW	Resubmittal
08.30.2023	SAW	Resubmittal




Municipal Number P21-116

20-276.17 Tradition Regional Park- Landscape-re

Future Land Use: NCD
Existing Zoning: MPUD
Existing Use: Vacant



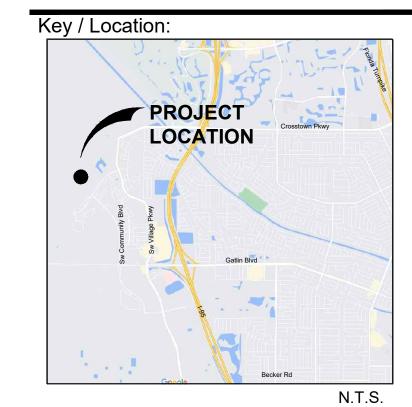

Project Team:

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

Land Planner / Lucido & Associates

And Planner / Lucido & Associates

701 E Ocean Boulevard

Stuart, FL 34994

Kimley Horn 445 24th Street, Suite 200

Vero Beach, FL 32960

Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984


Tradition Regional Park

Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116


	<u> </u>	SLUD No. 5410
Date	Ву	Description
05.18.21	PĞ	1st Submittal
04.06.22	SAW	Resubmittal
07.06.2022	SAW	Resubmittal
07.19.2023	SAW	Resubmittal
08.30.2023	SAW	Resubmittal




REG. # 1018 Thomas P. Lucido


Manager

Project Number Municipal Number P21-116 20-276.17 Tradition Regional Park- Landscape-re

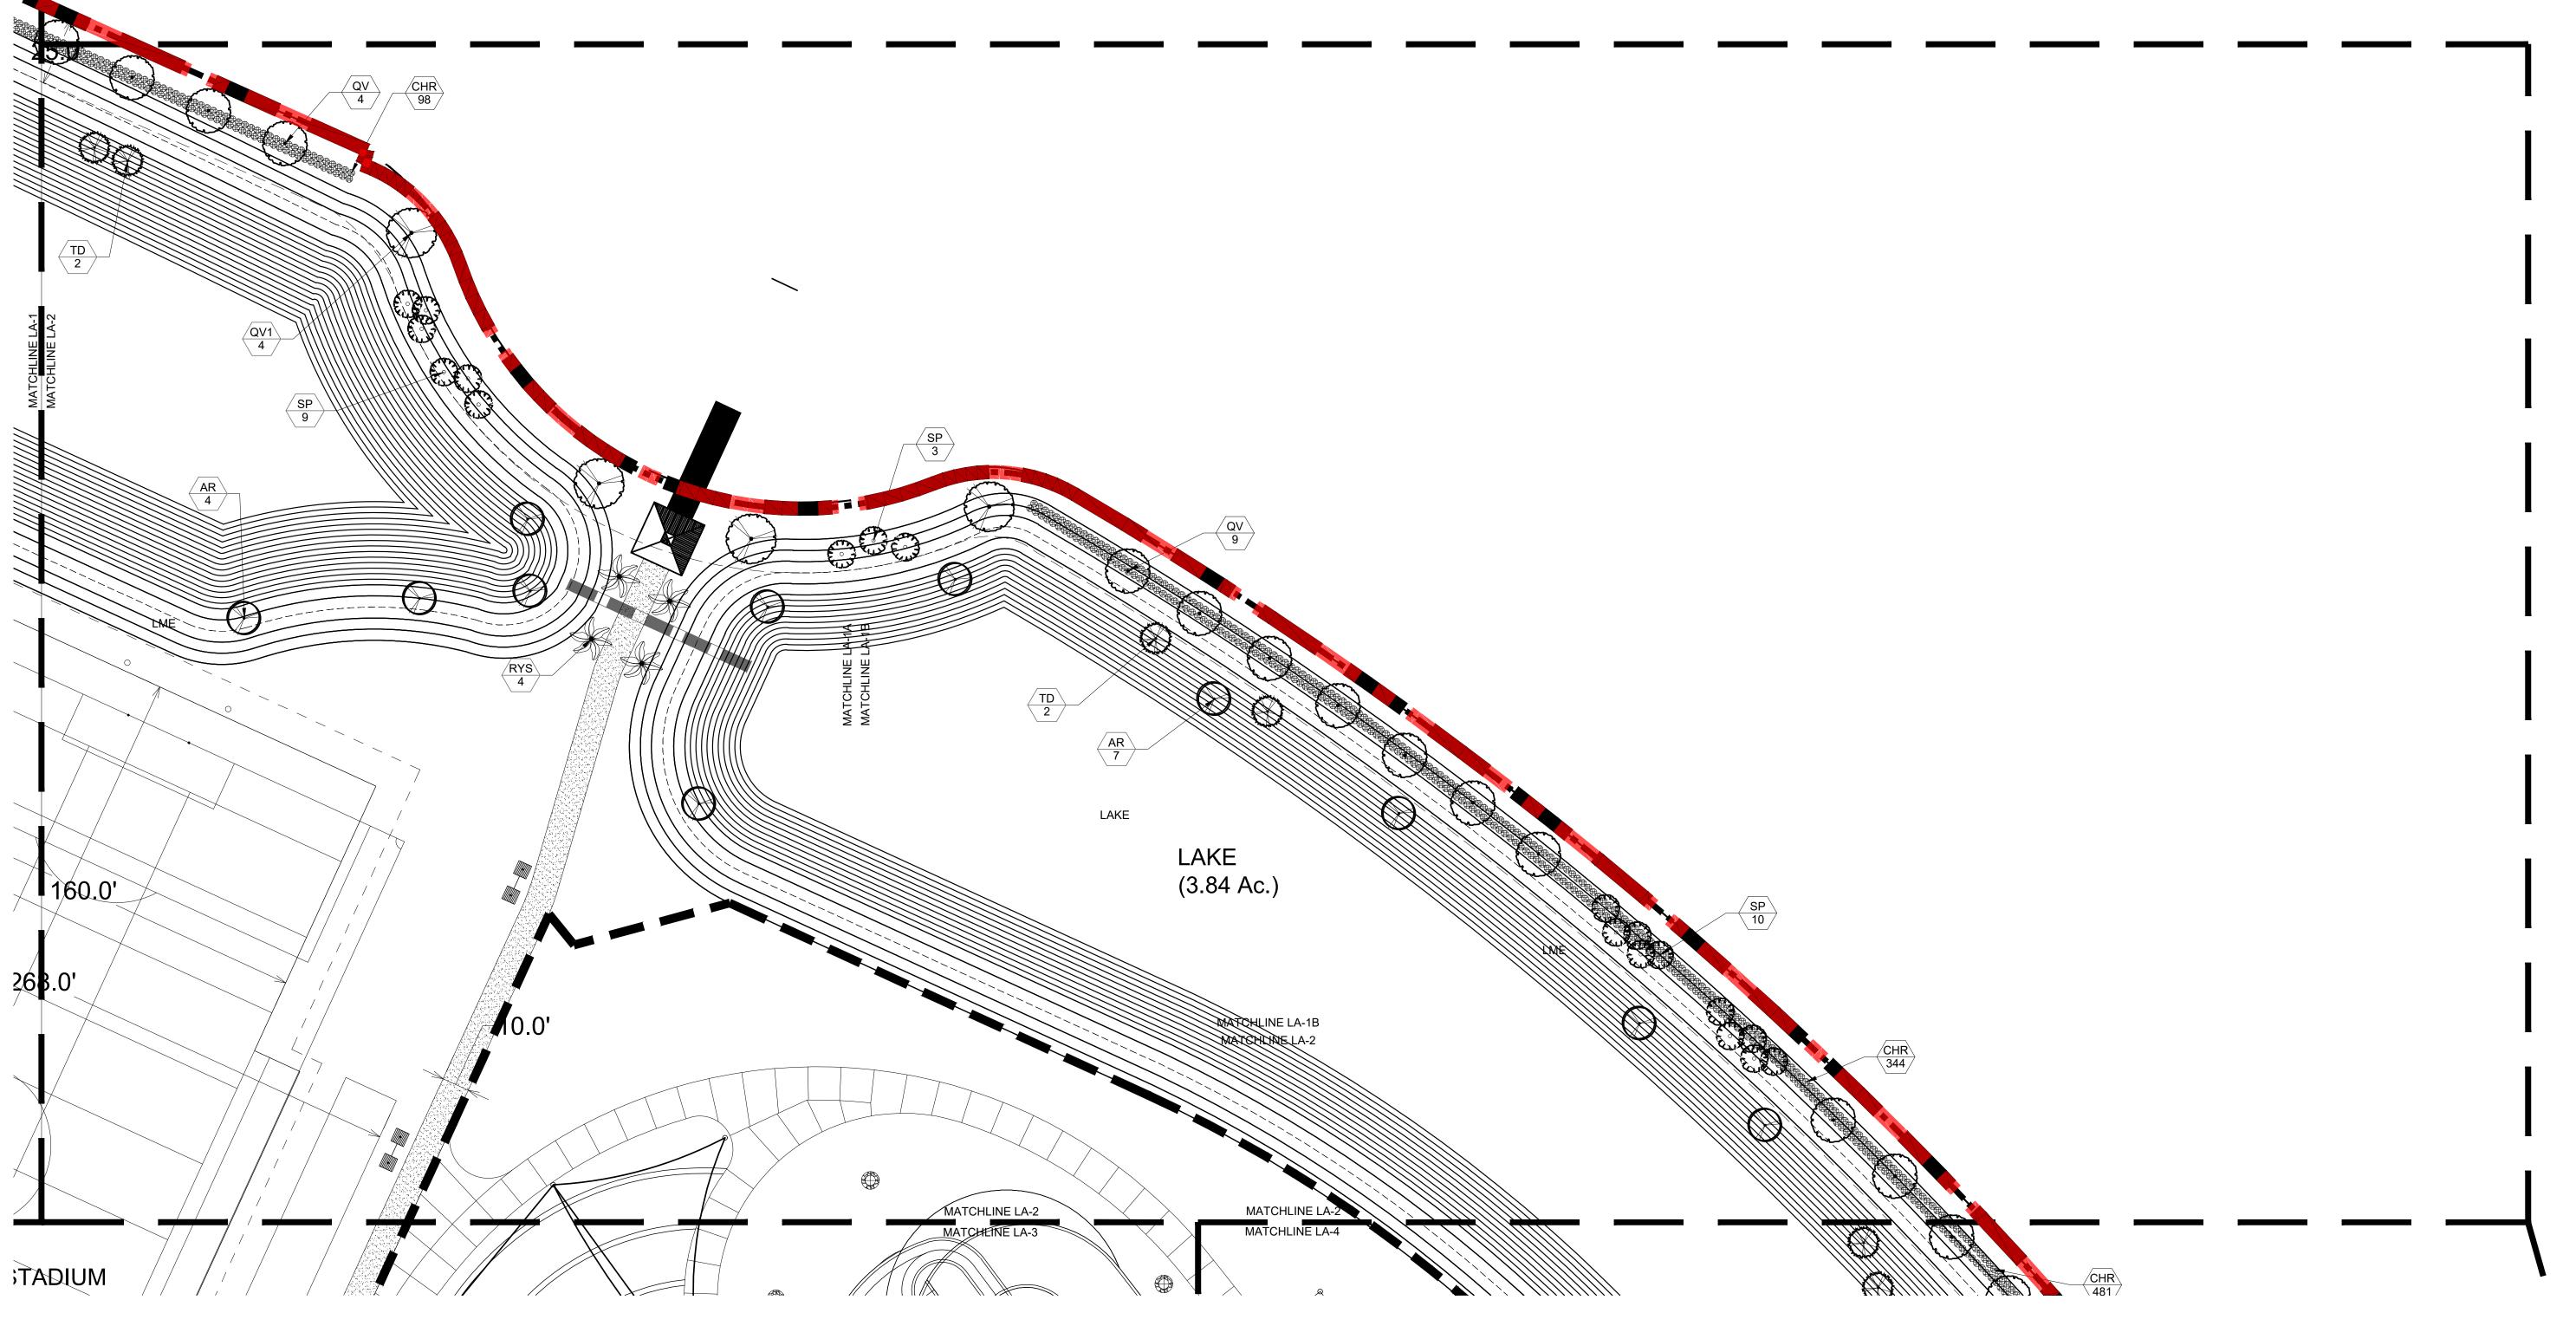

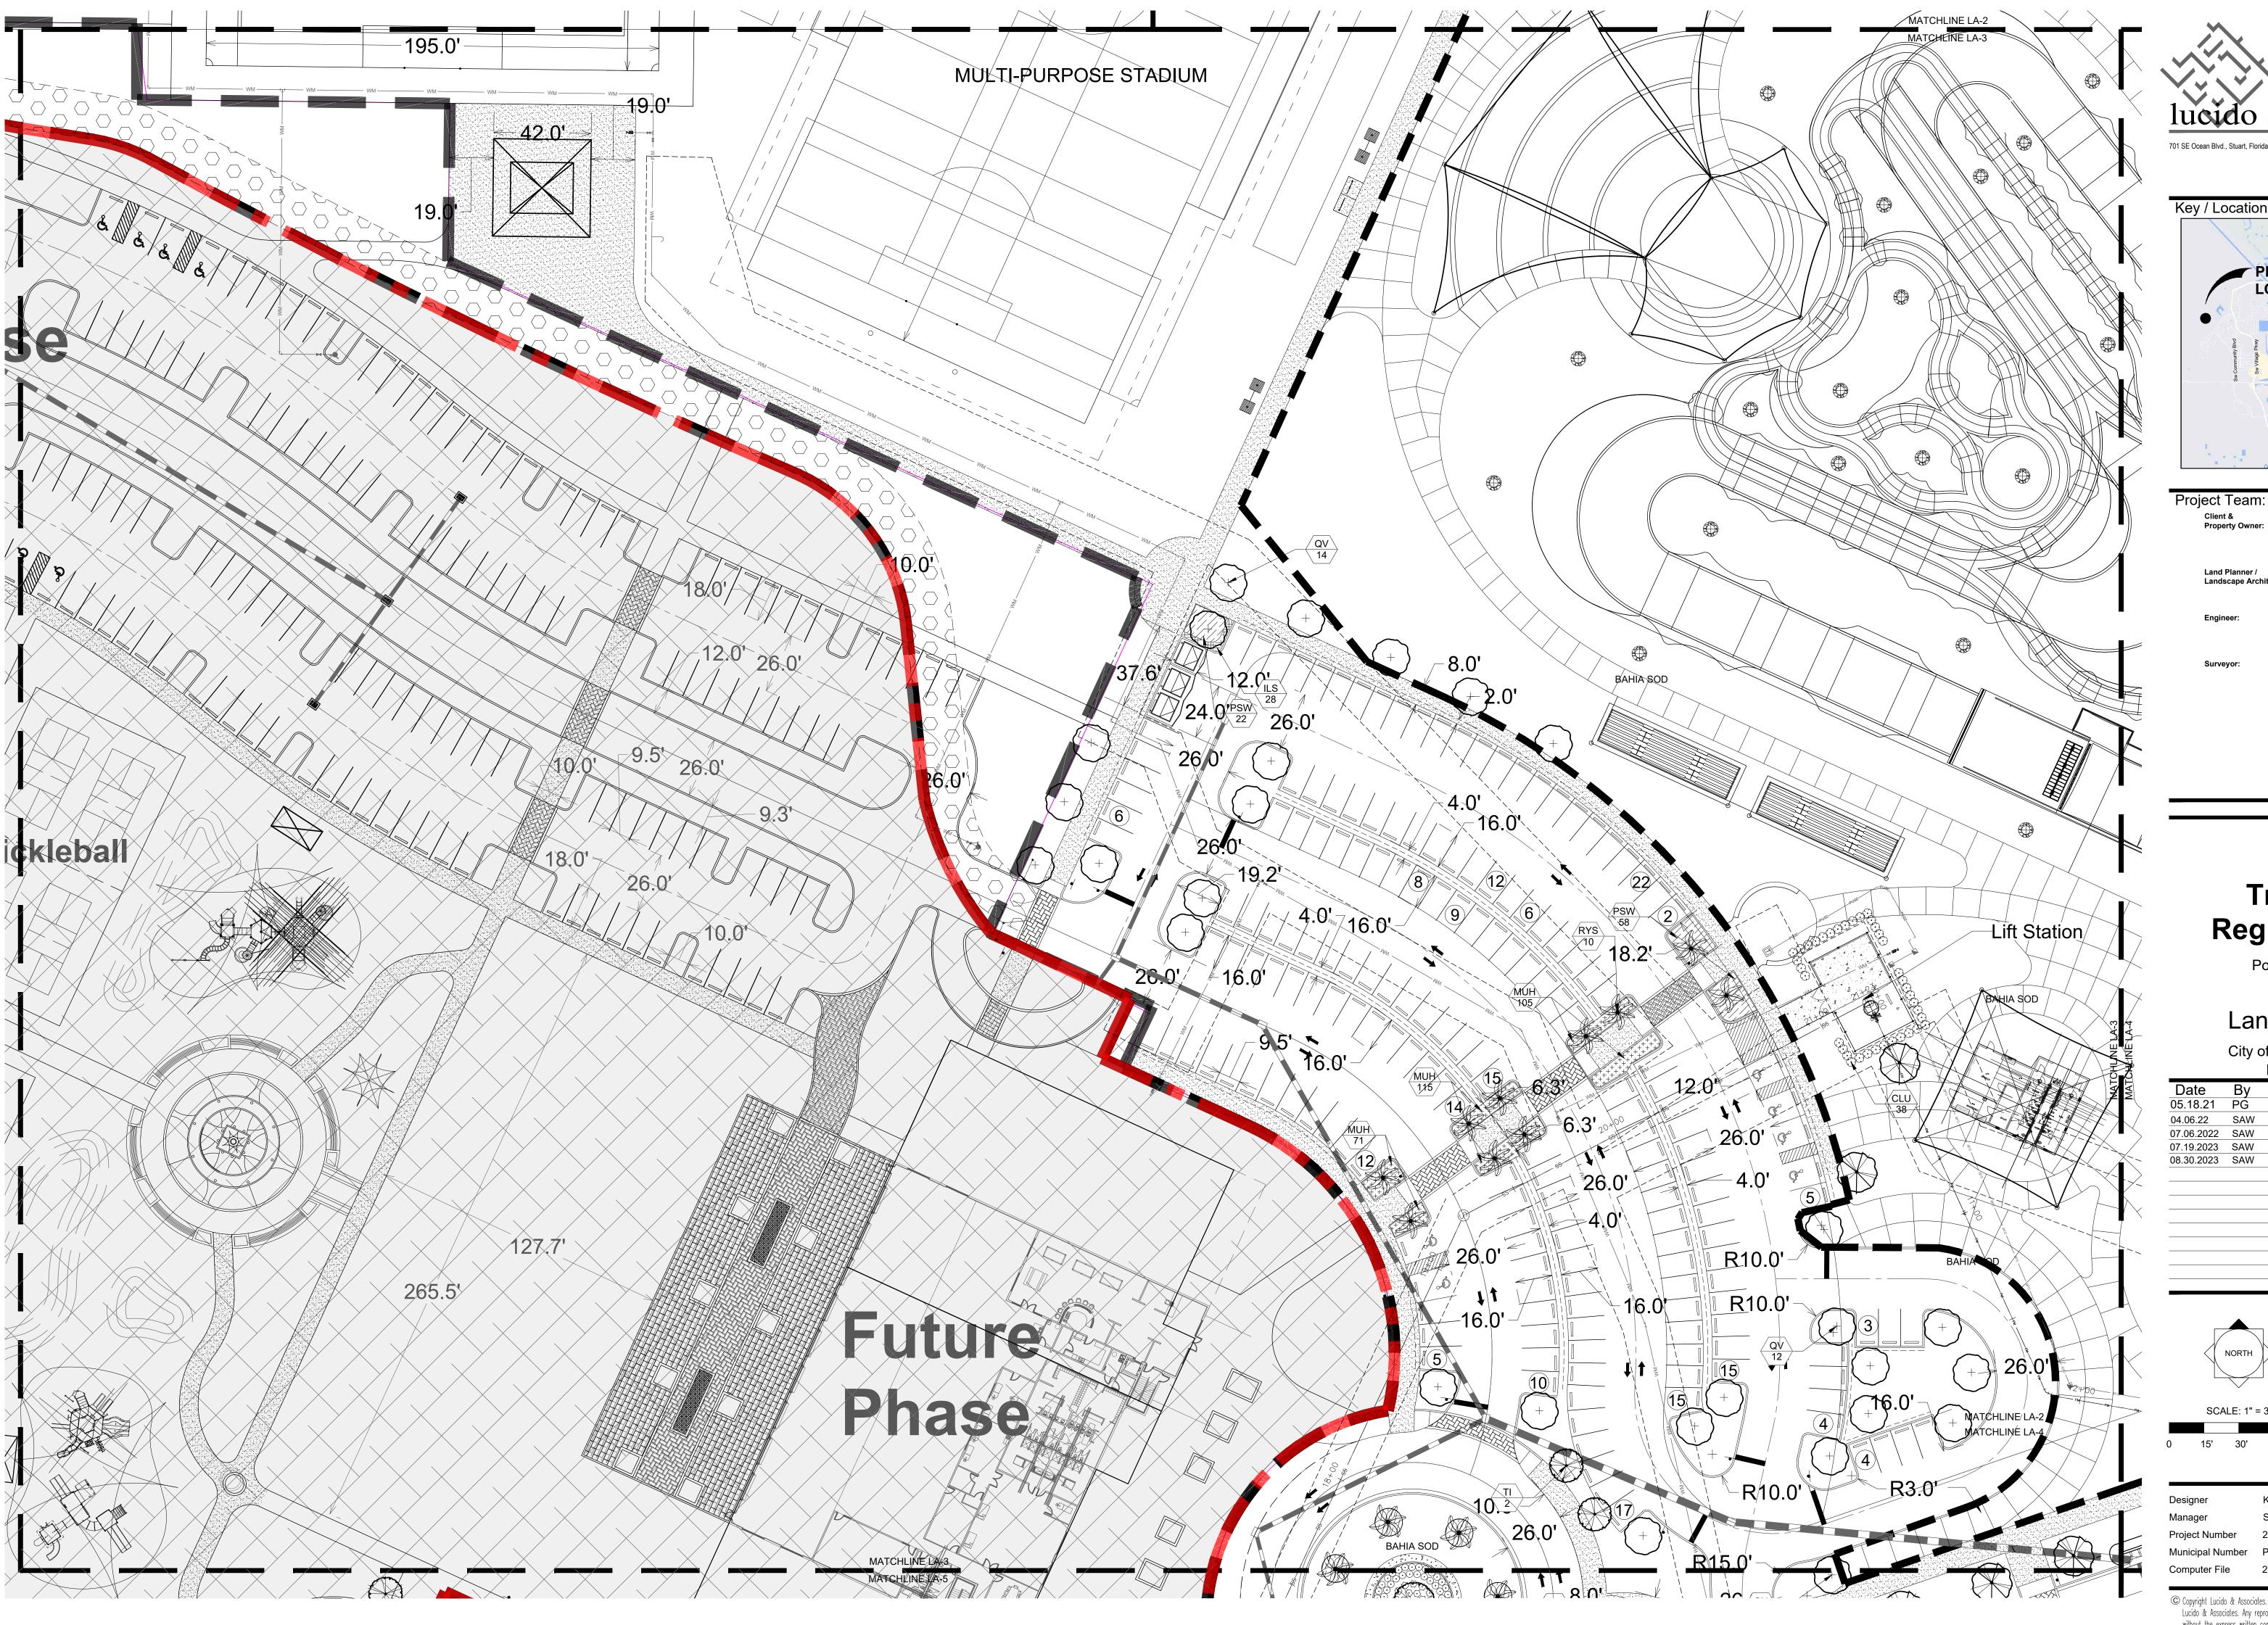



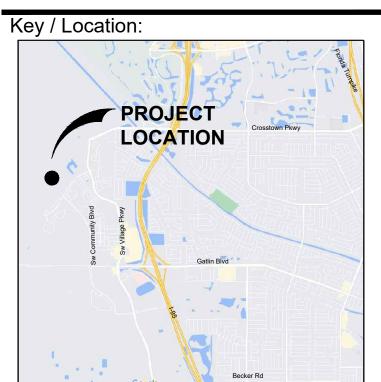

N.T.S. Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426 Lucido & Associates

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960

Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984


Tradition Regional Park

Port St. Lucie, FL


Phase 1 Landscape Plan

City of Port St. Lucie P21-116 PSLUD No. 5410

		1 0200 110. 0110
Date	Ву	Description
5.18.21	PĞ	1st Submittal
4.06.22	SAW	Resubmittal
7.06.2022	SAW	Resubmittal
7.19.2023	SAW	Resubmittal
8.30.2023	SAW	Resubmittal



without the express written consent of Lucido & Associates is prohibited by law.

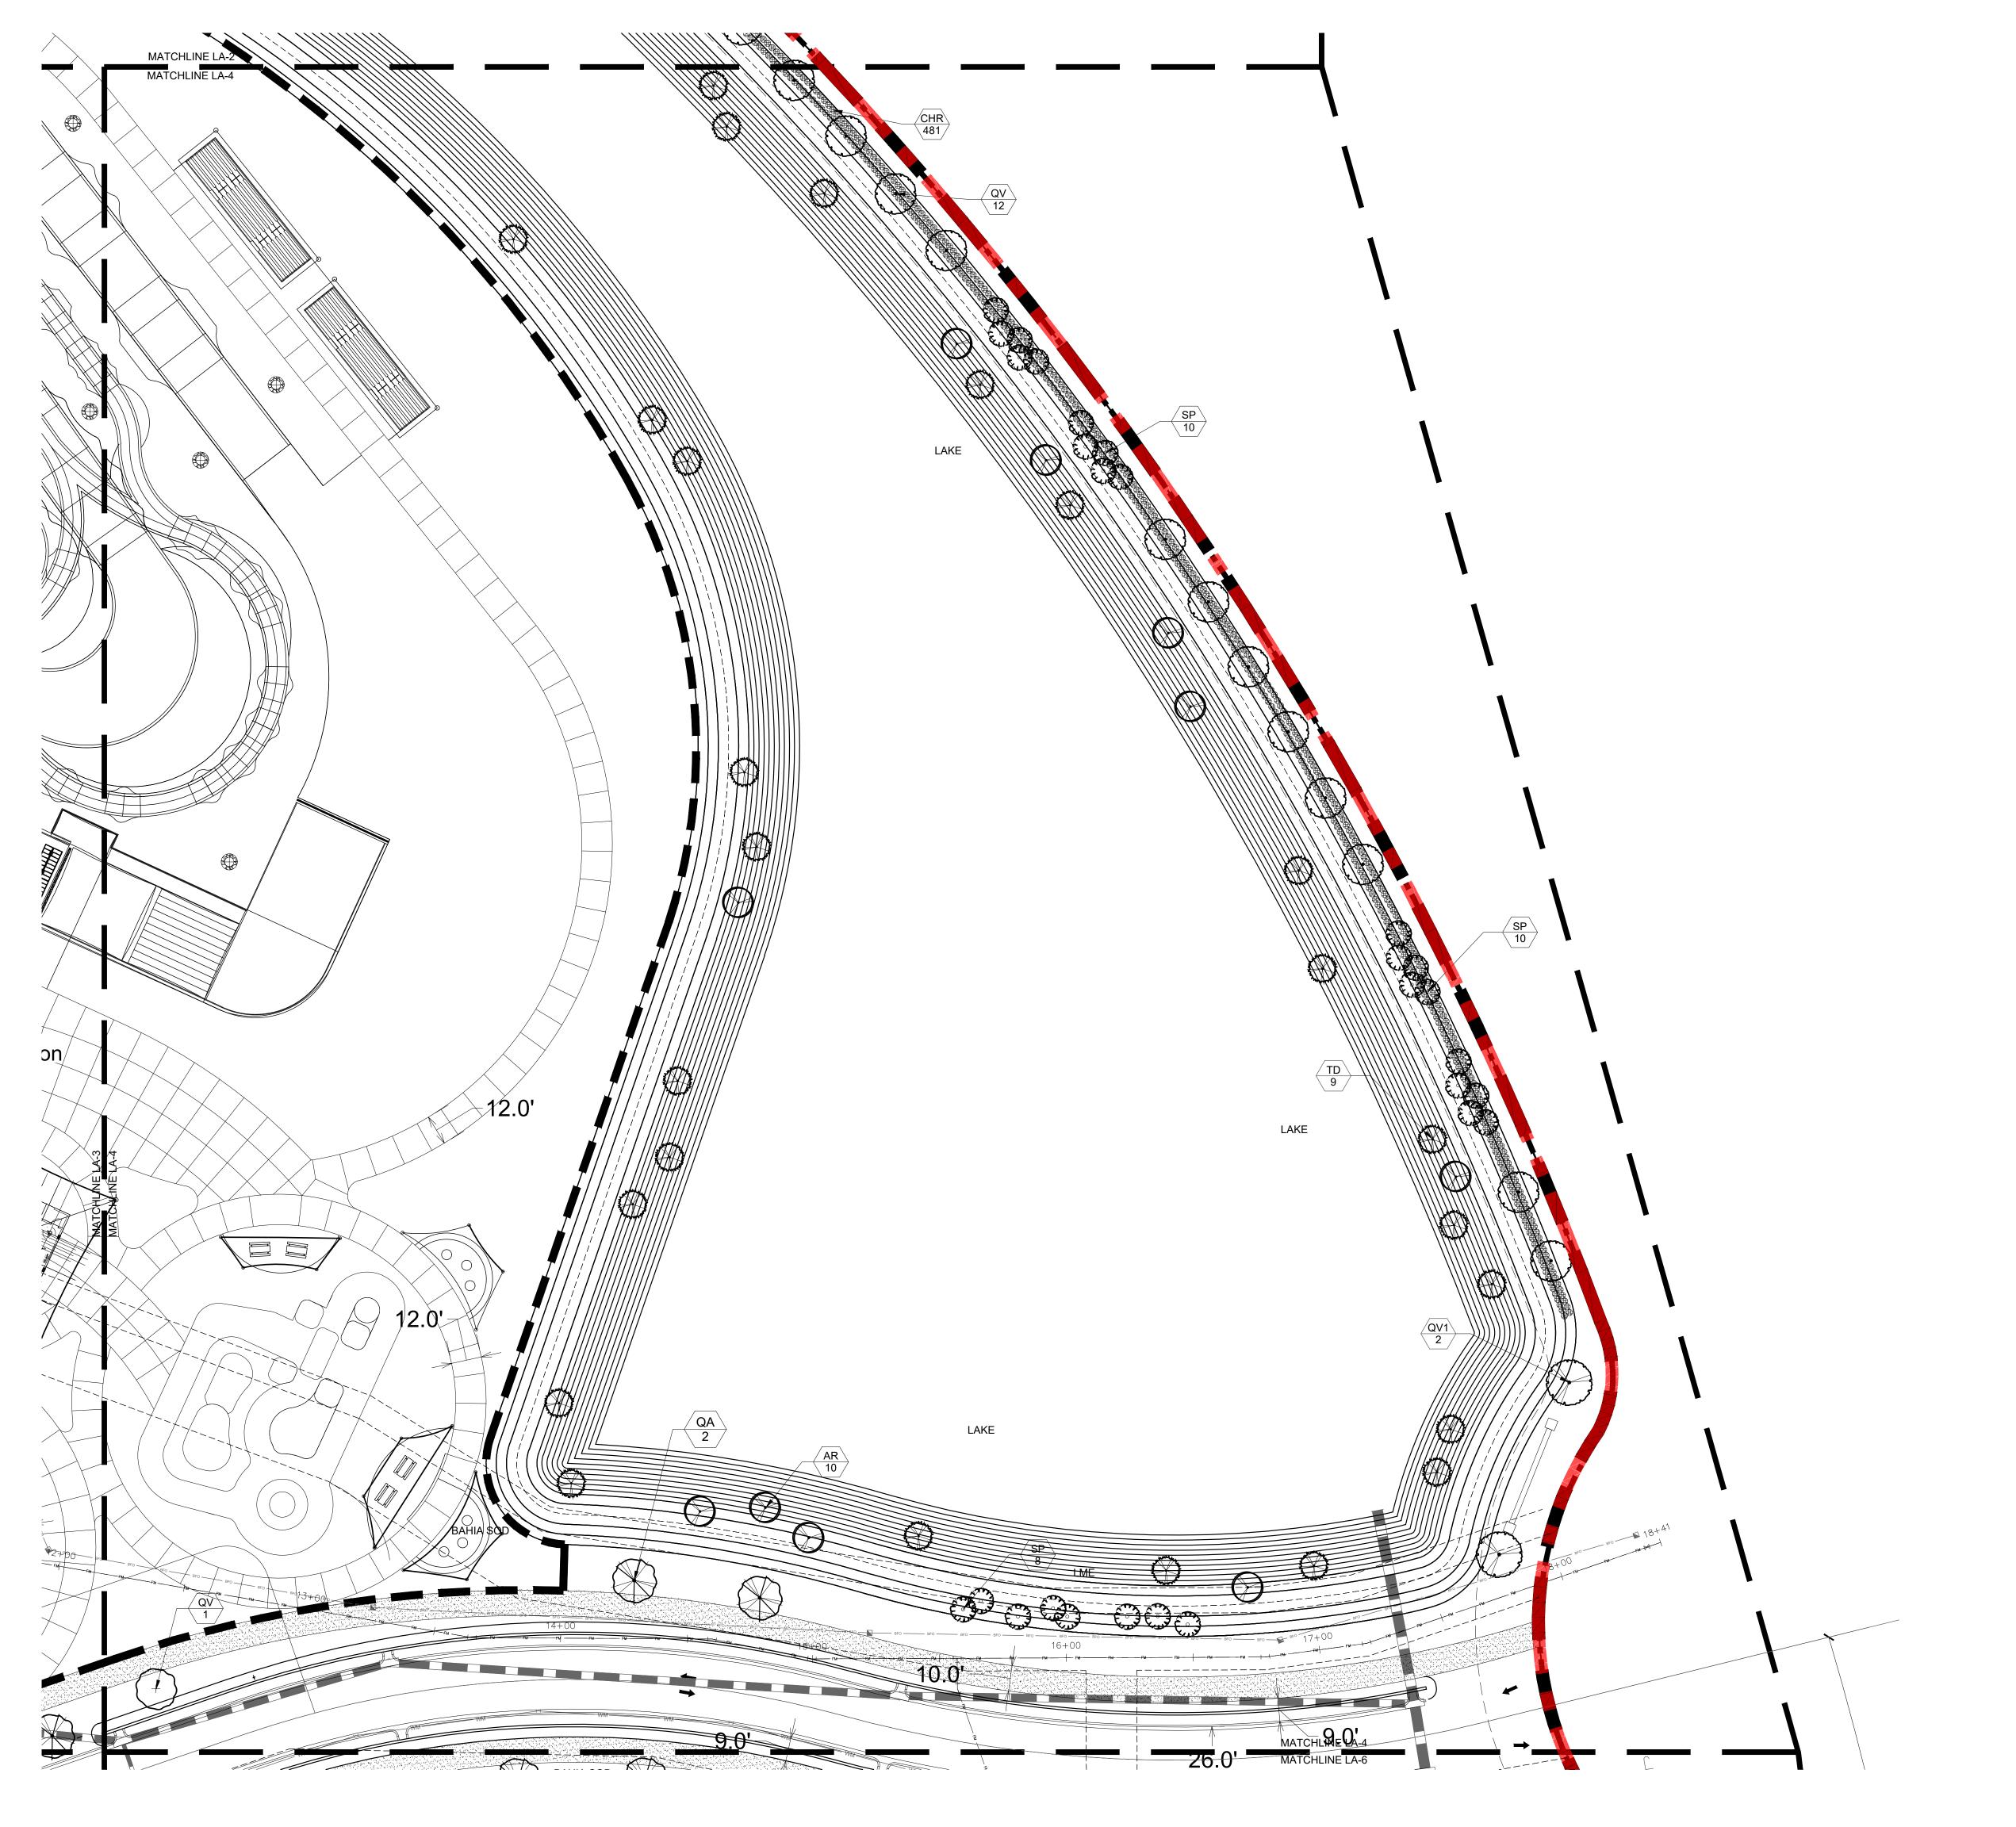



Key / Location:



Project Team:

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

Land Planner / Lucido & Associates

And Planner / Lucido & Associates

701 E Ocean Boulevard

Stuart, FL 34994

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960

Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park


Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116


PSLUD No. 5410 Description

04.06.22 SAW Resubmittal




Municipal Number P21-116

20-276.17 Tradition Regional Park- Landscape-re

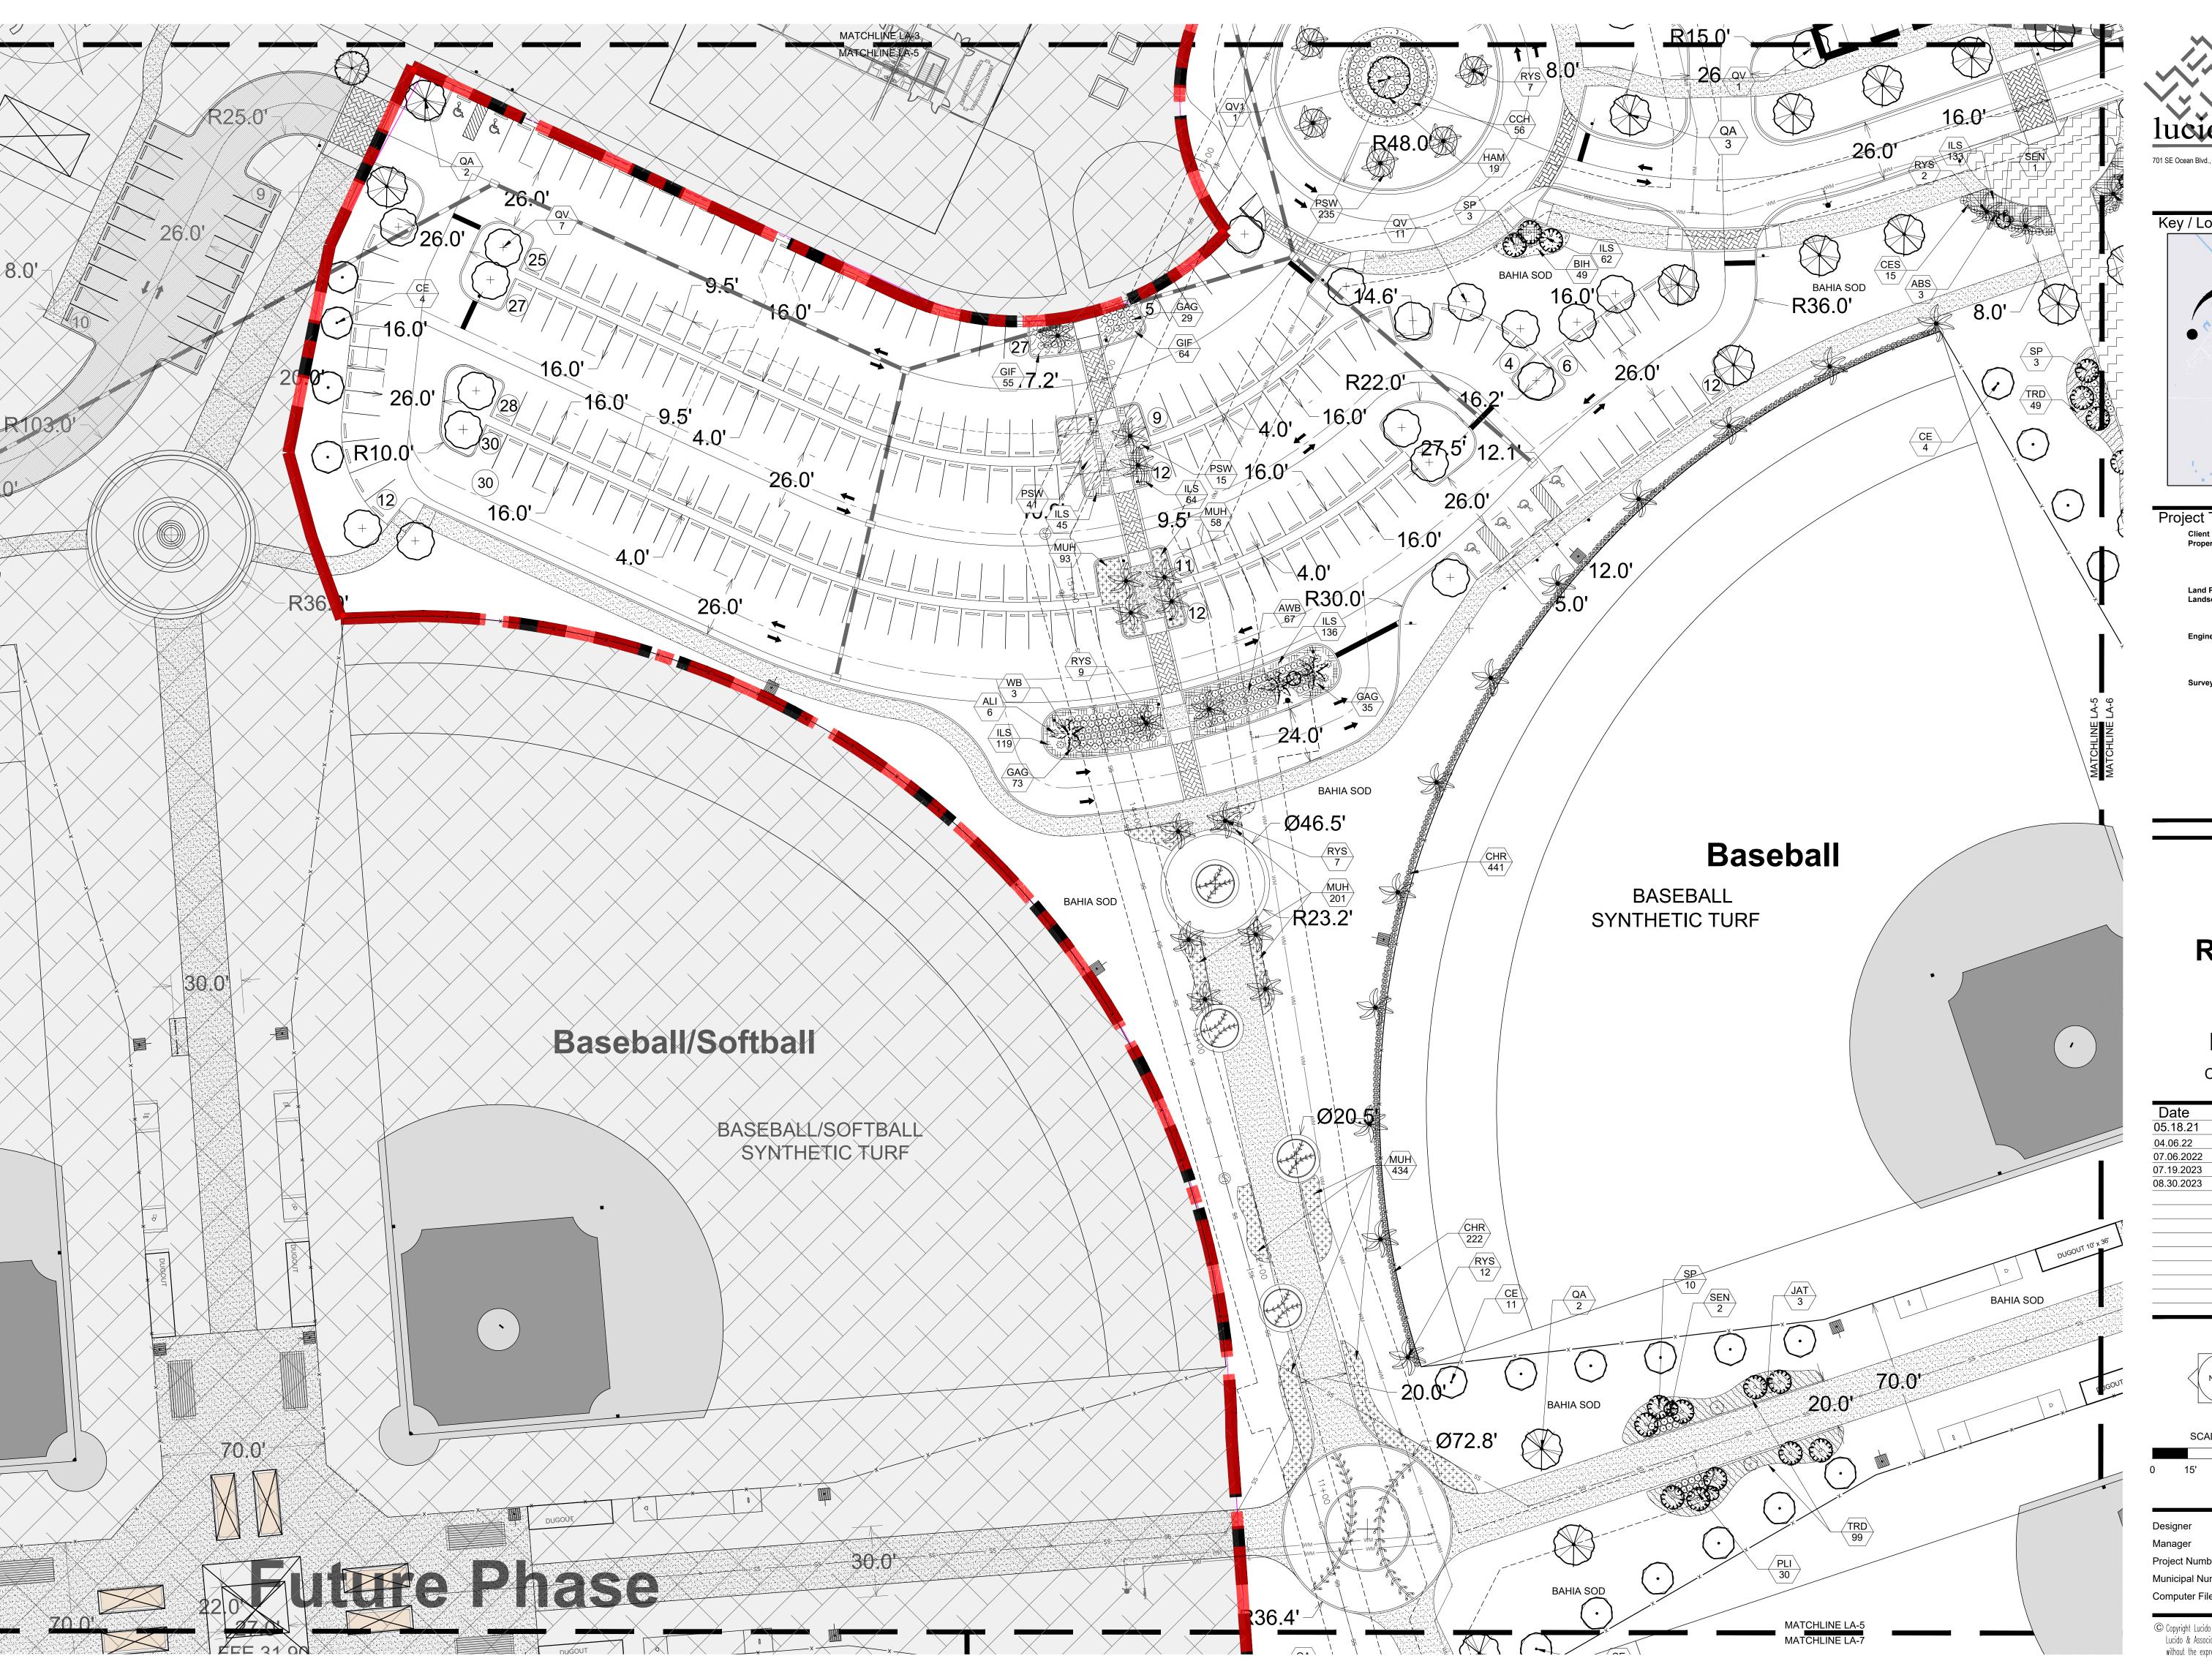



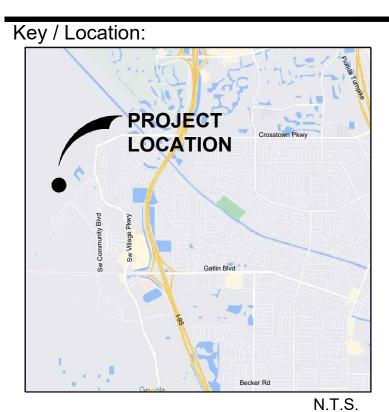




Tradition Regional Park

Port St. Lucie, FL

Phase 1 Landscape Plan

City of Port St. Lucie P21-116 PSLUD No. 5410

		-3LUD NO. 34 IU
Date	Ву	Description
)5.18.21	PĞ	1st Submittal
04.06.22	SAW	Resubmittal
7.06.2022	SAW	Resubmittal
7.19.2023	SAW	Resubmittal
8.30.2023	SAW	Resubmittal




30' 60' REG. # 1018 Thomas P. Lucid

Designer KV Sheet


Manager SG

Project Number 20-276.17

Municipal Number P21-116

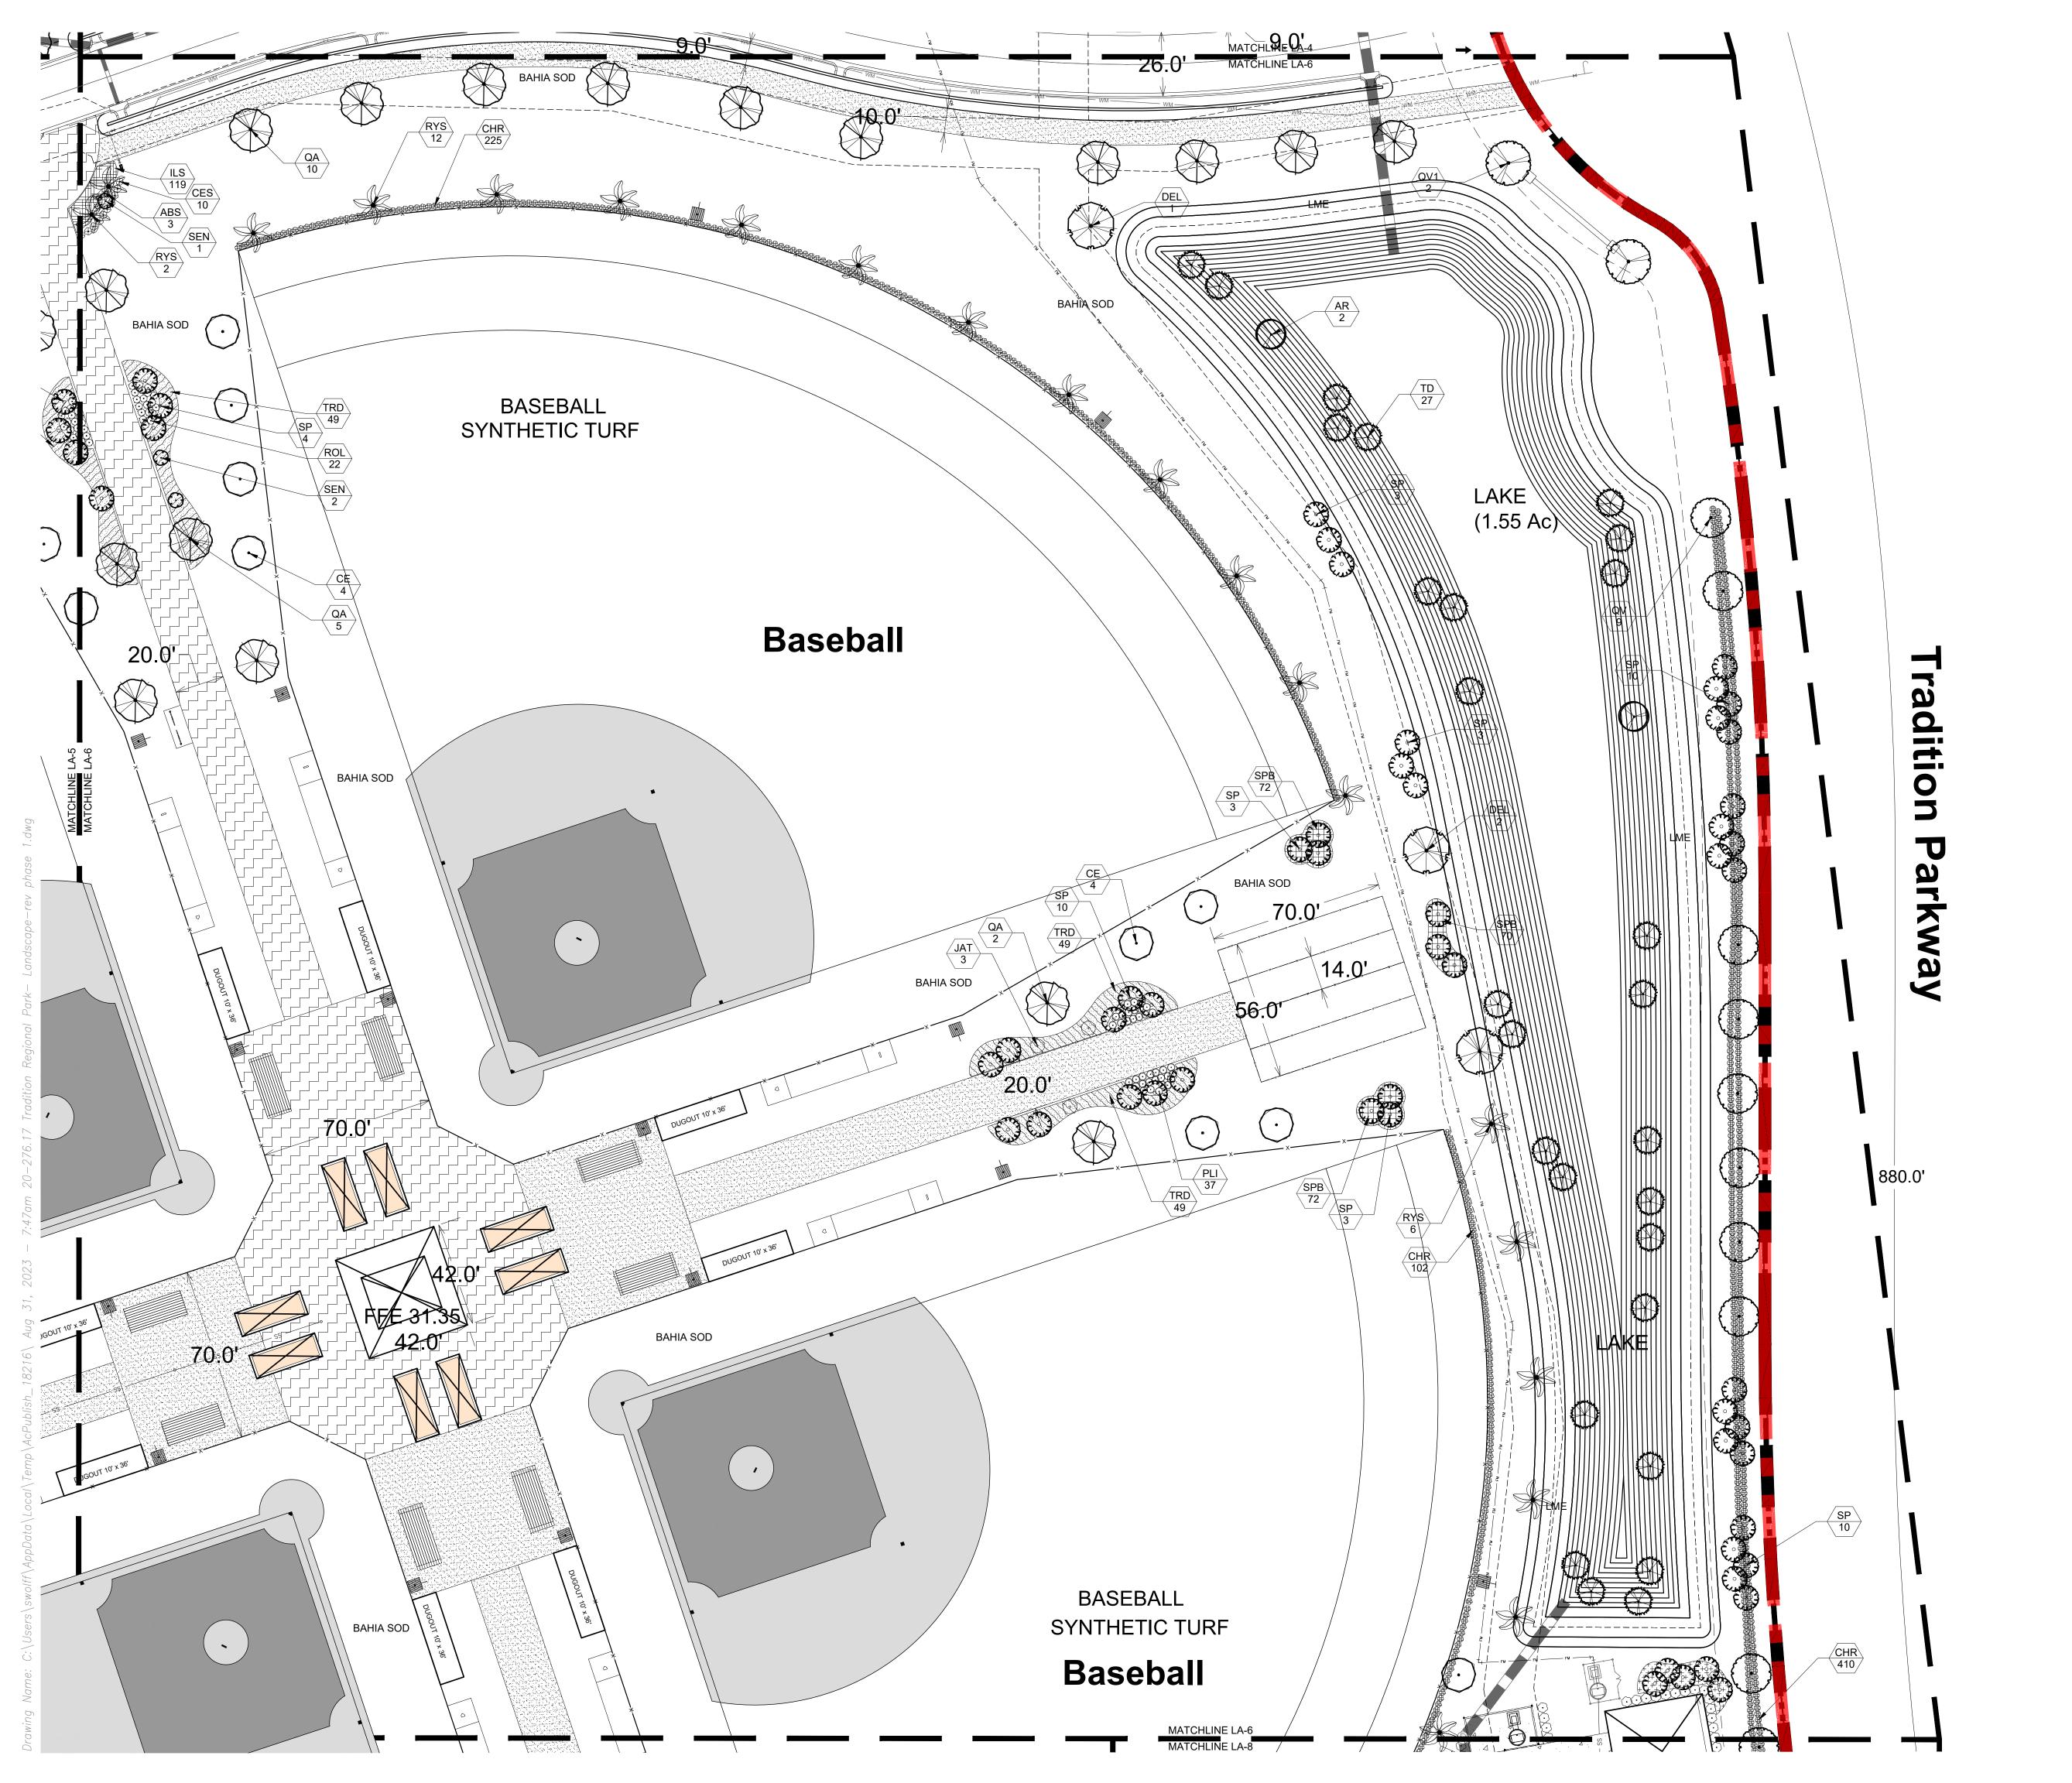



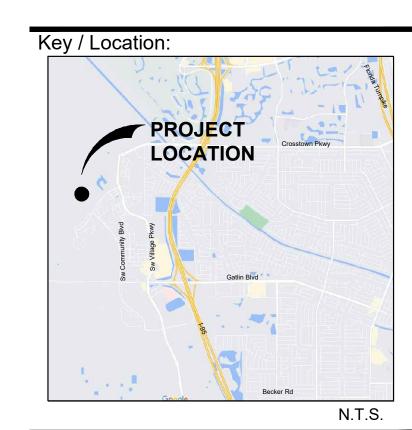

Future Land Use: NCD

Existing Zoning: MPL Existing Use: Vacc

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

701 E Ocean Boulevard

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960


410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park

Port St. Lucie, FL Phase 1 Landscape Plan


City of Port St. Lucie P21-116 PSLUD No. 5410

	ı	3L0D No. 34 10	
Date	By	Description	
05.18.21	PĞ	1st Submittal	
04.06.22	SAW	Resubmittal	
07.06.2022	SAW	Resubmittal	
07.19.2023	SAW	Resubmittal	
08.30.2023	SAW	Resubmittal	




REG. # 1018 Thomas P. Lucido

Project Number Municipal Number P21-116 20-276.17 Tradition Regional Park- Landscape-re

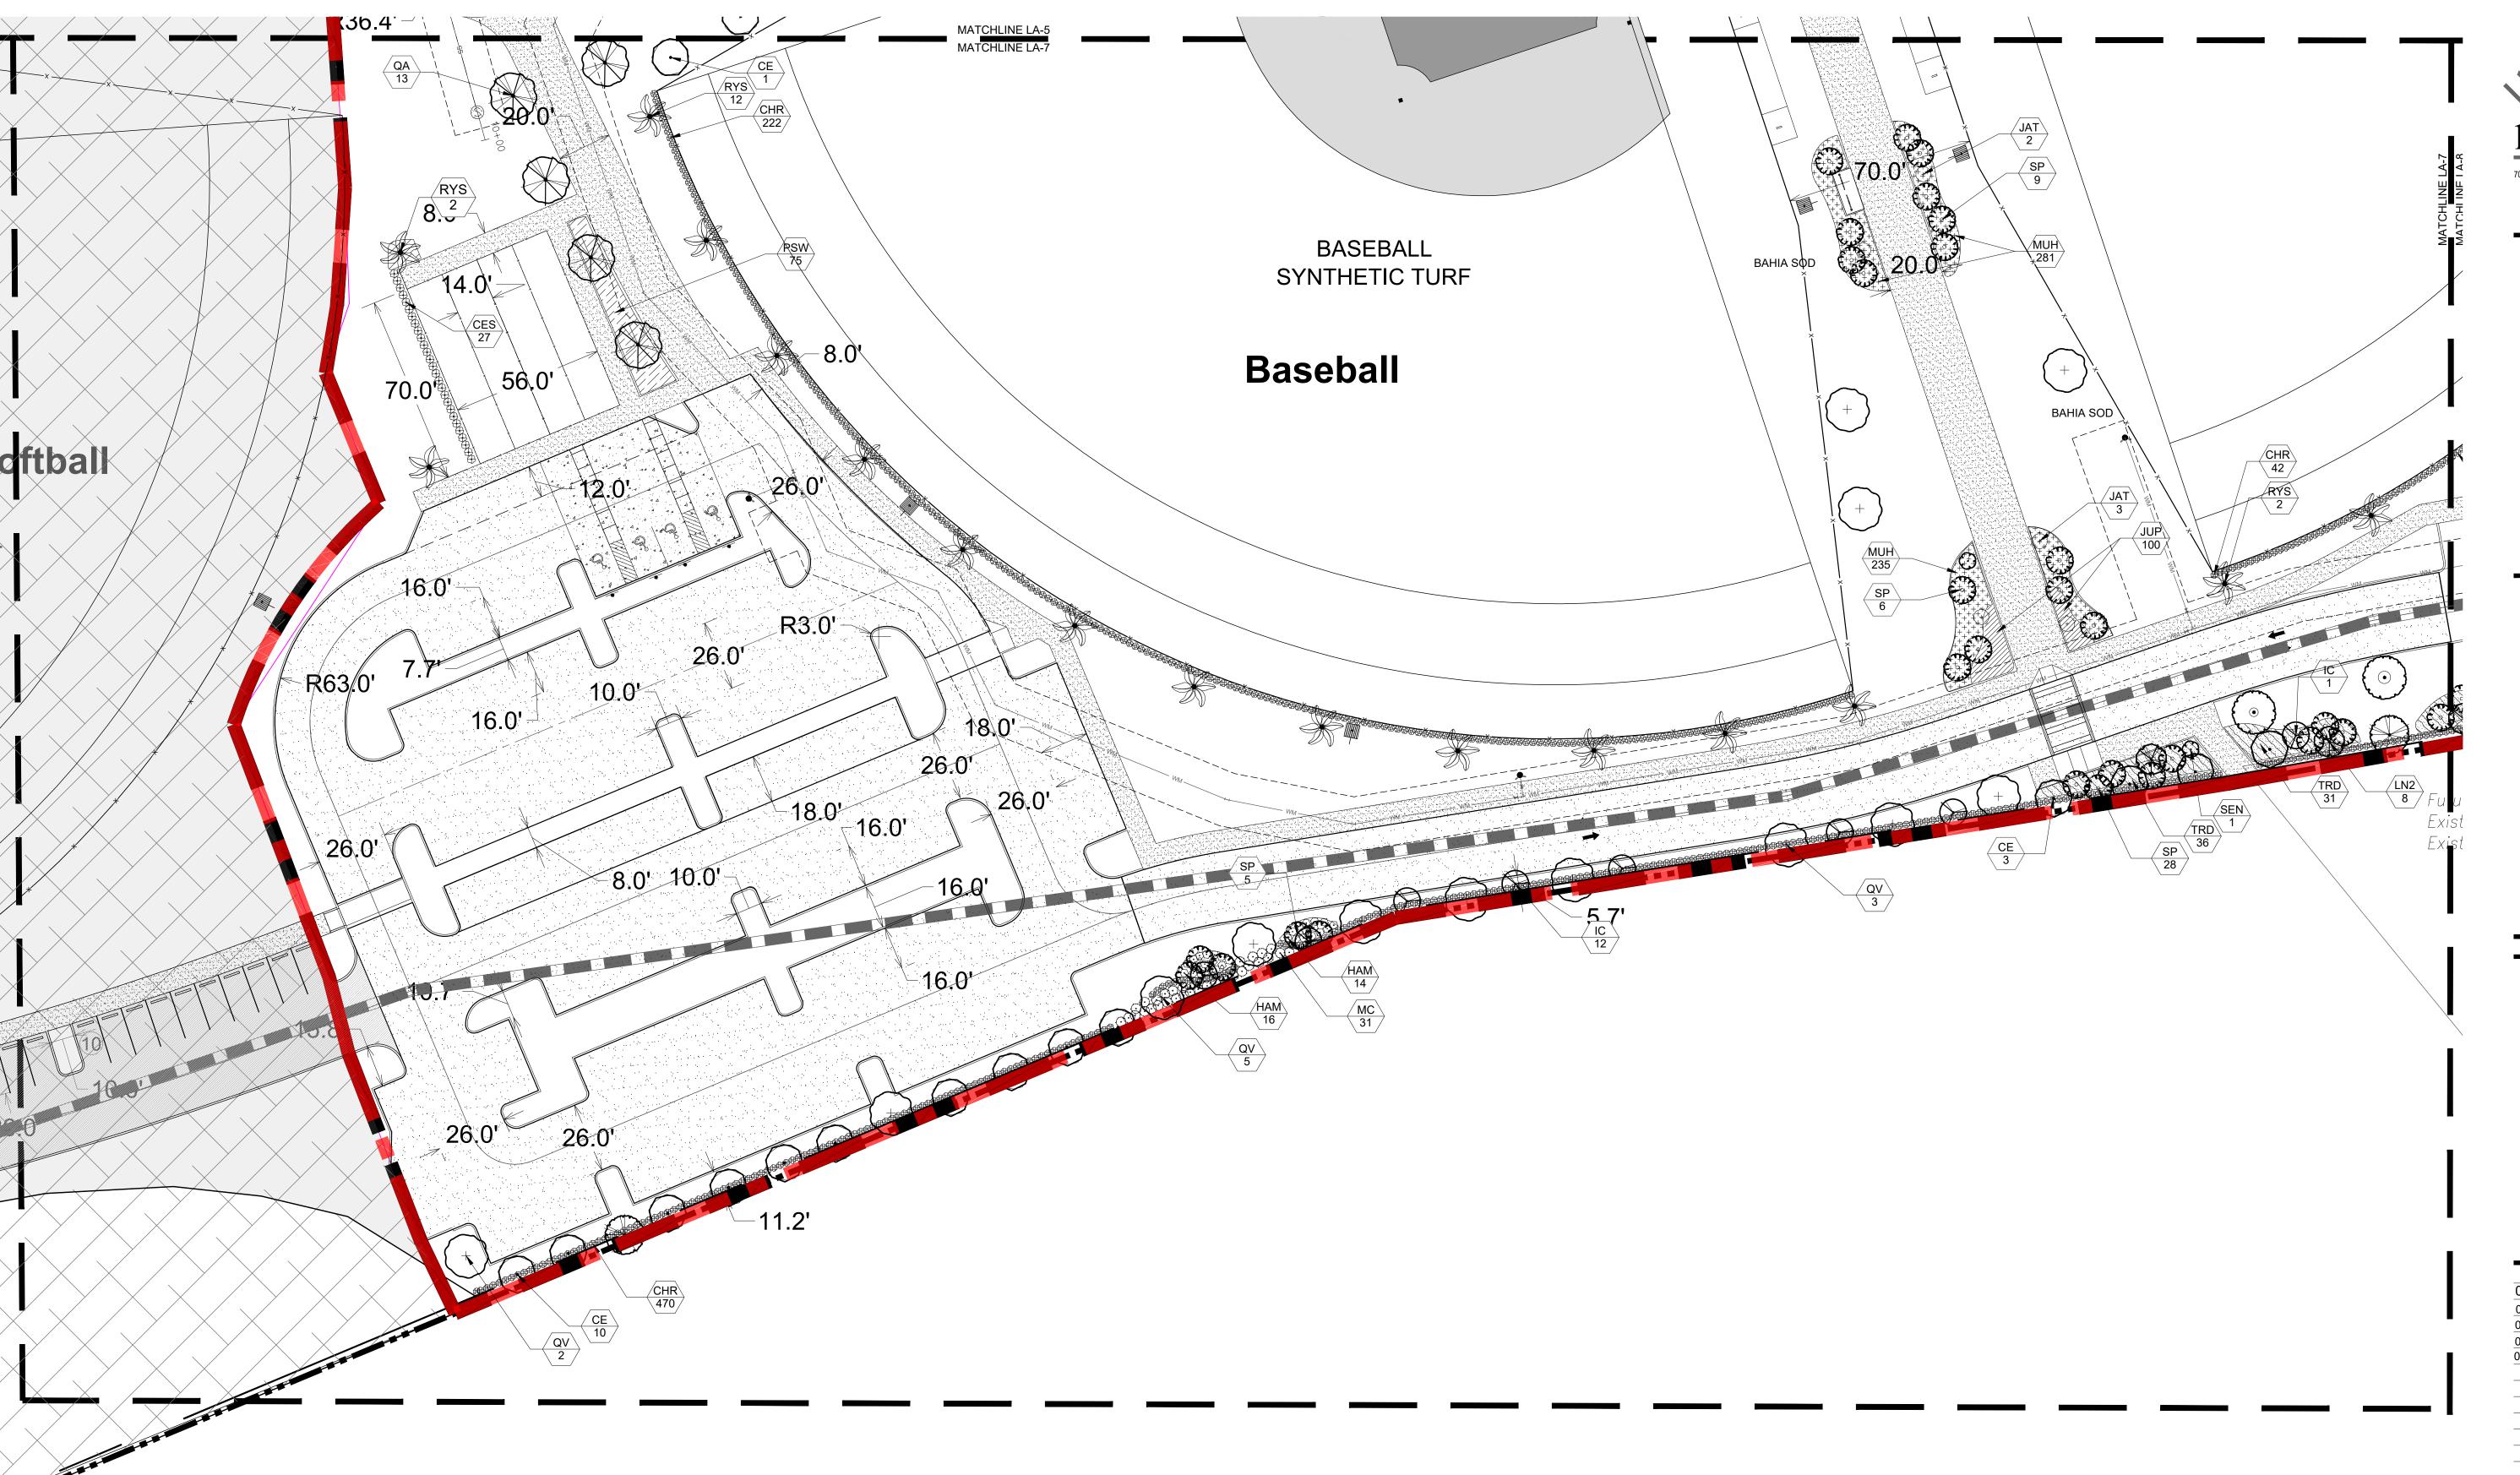

Wetland



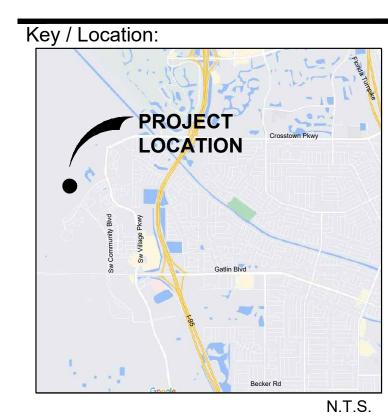

Project Team: Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

> Lucido & Associates 701 E Ocean Boulevard

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960


410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park

Port St. Lucie, FL Phase 1 Landscape Plan

City of Port St. Lucie P21-116


PSLUD No. 5410 Description 05.18.21 PG 1st Submittal 04.06.22 SAW Resubmittal 07.06.2022 SAW Resubmittal 07.19.2023 SAW Resubmittal 08.30.2023 SAW Resubmittal




REG. # 1018 Thomas P. Lucido

Manager Project Number Municipal Number P21-116

20-276.17 Tradition Regional Park- Landscape-re

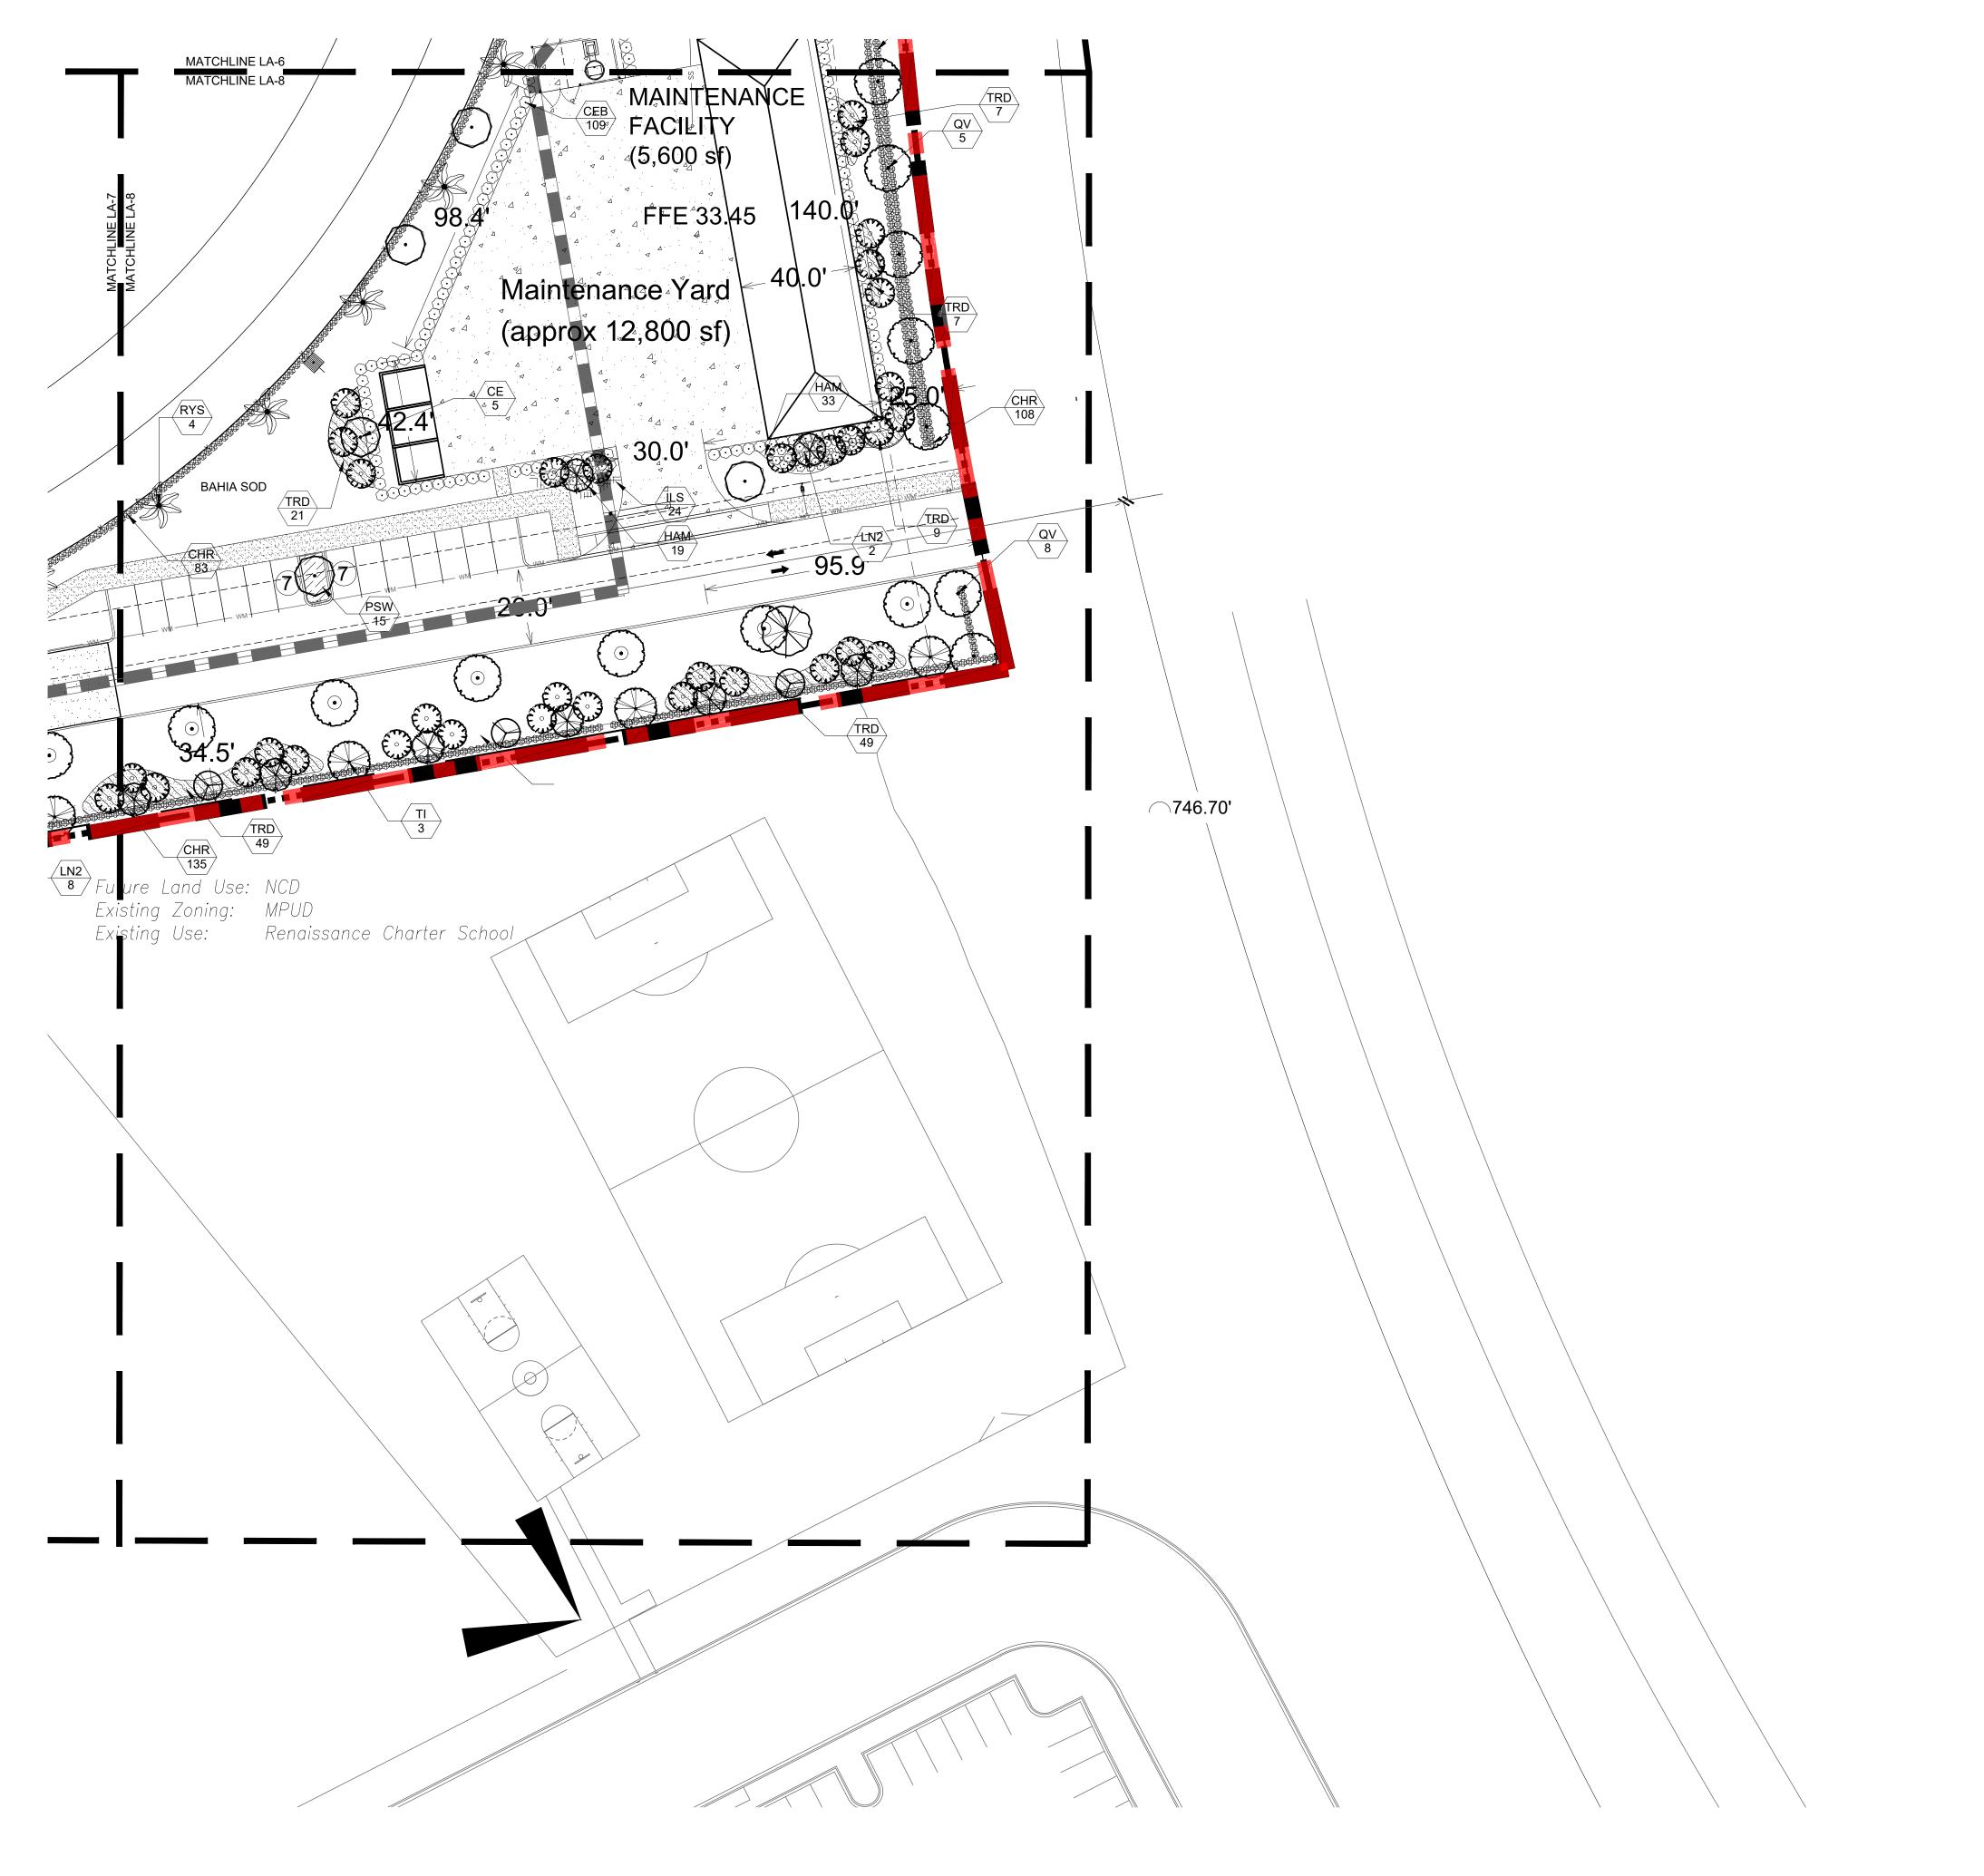



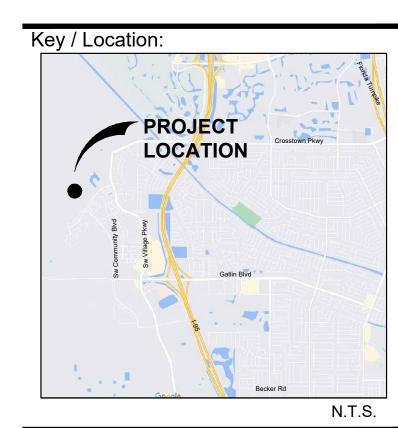

Project Team:

Mattamy Homes, LLC. 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

Land Planner / Lucido & Associates

And Planner / Lucido & Associates

701 E Ocean Boulevard

Stuart, FL 34994

Kimley Horn 445 24th Street, Suite 200 Vero Beach, FL 32960


Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park

Port St. Lucie, FL Phase 1 Landscape Plan

City of Port St. Lucie P21-116


	F	PSLUD No. 5410	
Date	Ву	Description	
)5.18.21	PĞ	1st Submittal	
04.06.22	SAW	Resubmittal	
7.06.2022	SAW	Resubmittal	
7.19.2023	SAW	Resubmittal	
8.30.2023	SAW	Resubmittal	




REG. # 1018 Thomas P. Lucido

Manager Project Number 20-276.17 Municipal Number P21-116

20-276.17 Tradition Regional Park- Landscape-re

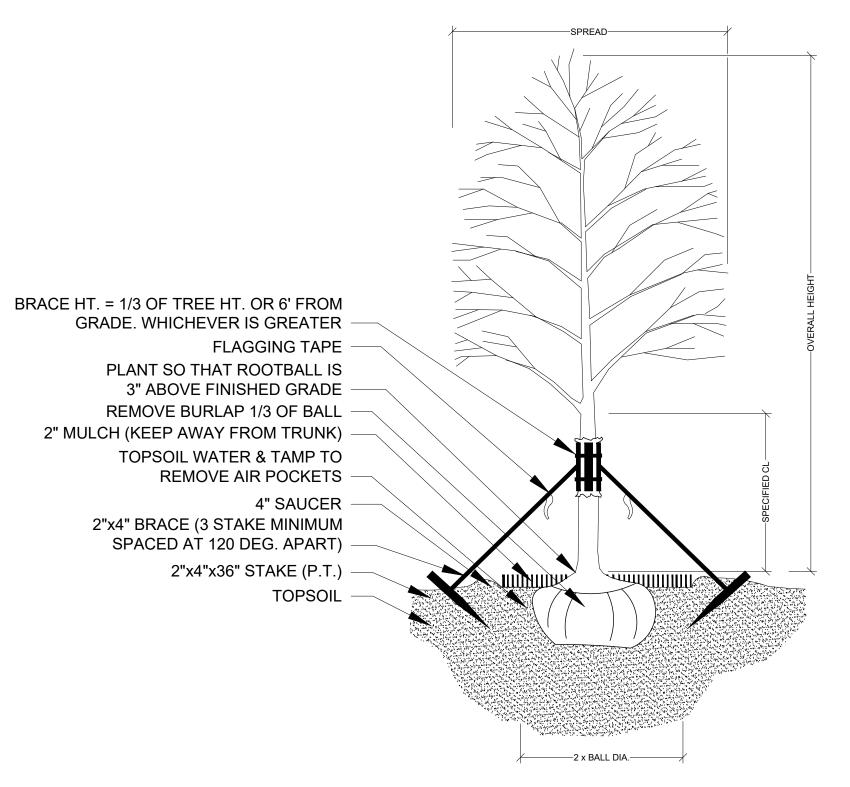


(5) 2x4x16" WOOD BATTENS SECURE BATTENS W/ (2) 3/4" HIGH CARBON STEEL BANDS TO HOLD BATTENS IN PLACE DURING PLANTING PROJECT. DO NOT NAIL (5) LAYERS OF BURLAP BATTENS TO TRUNK. HEIGHT OF BATTENS SHALL BE LOCATED IN RELATION TO THE HEIGHT OF THE TREE FOR ADEQUATE BRACING. STEEL BANDS **BRACING DETAIL** NOT TO SCALE WRAP TRUNK IN BURLAP & SECURE BATTENS W/ 3/4" HIGH CARBON STEEL BANDS FLAGGING TAPE 2"x4" BRACE (3 STAKE MINIMUM SPACED AT 120 DEG. APART) 2" MULCH (KEEP AWAY FROM TRUNK) FORM SAUCER WITH 4" CONTINUOUS RIM 2x4x36" STAKE (P.T.) **TOPSOIL**

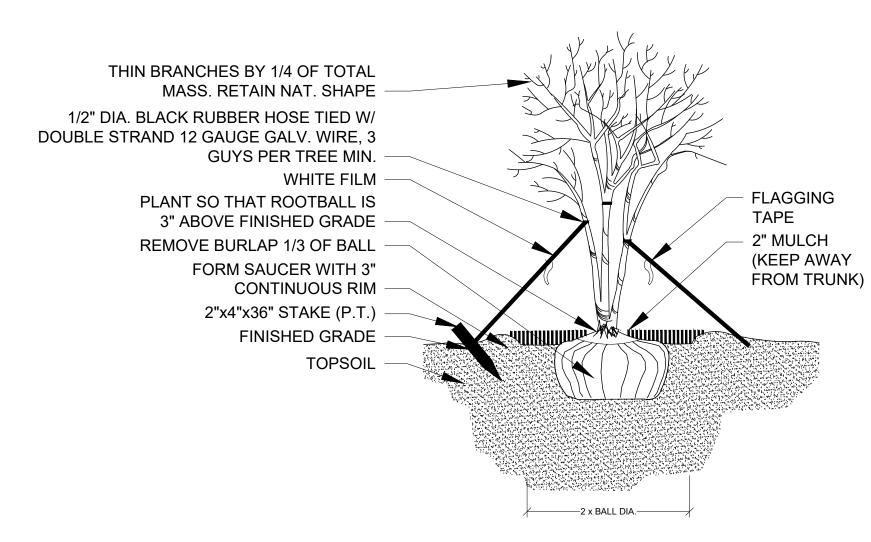

MULTI-TRUNK PLANTING & GUYING



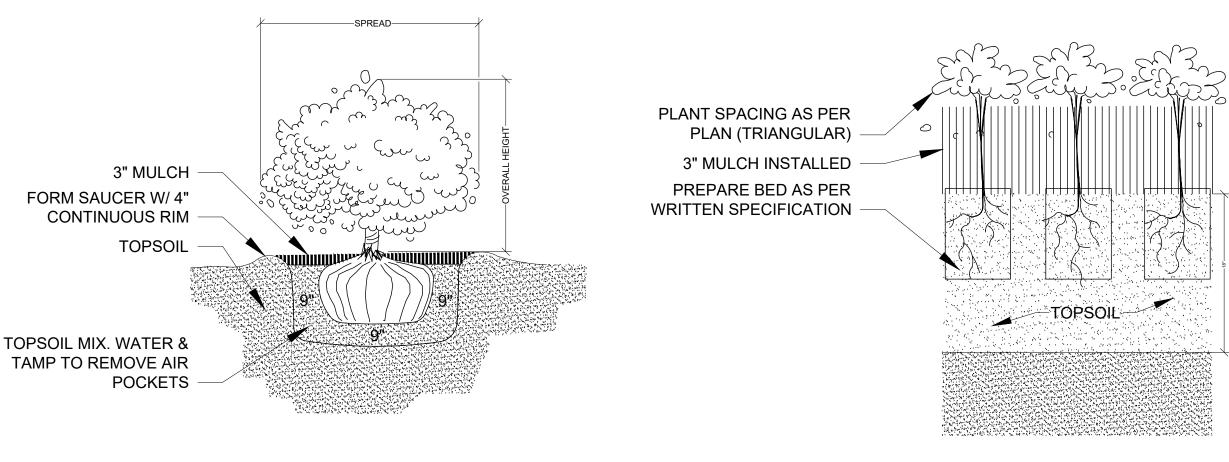

GROUNDCOVER PLANTING DETAIL

4"CROWN MIN. or 2% MIN. SLOPE PAVEMENT THIS DETAIL SHOWN DEPICTS A MEDIAN AND/OR LANDSCAPE ISLAND AND IS

NOT TO SCALE

THIS DETAIL SHOWN DEPICTS A MEDIAN AND/OR LANDSCAPE ISLAND AND IS FOR GRAPHIC PURPOSES ONLY; SOIL PREPARATION SHALL APPLY TO ALL TREE, SHRUB, & GROUND COVER AREAS. THIS DOES NOT INCLUDE SOD AREAS

LANDSCAPE AREA PREPARATION DETAIL

- *TOPSOIL SHALL BE NATURAL, FRIABLE, FINE LOAMY SOIL POSSESSING CHARACTERISTICS OF REPRESENTATIVE TOPSOIL IN THE VICINITY OF THE PROJECT SITE THAT PRODUCES HEAVY GROWTH.
 *TOPSOIL SHALL HAVE A PH RANGE OF 5.5-7.4, FREE FROM SUBSOIL, WEEDS, LITTER, SODS, CLAY, STONES, STUMPS, ROOTS, TRASH, HERBICIDES, TOXIC SUBSTANCES, OR ANY OTHER MATERIAL WHICH MAY BE HARMFUL TO PLANT
- GROWTH, OR HINDER PLANTING OPERATIONS.

 TOPSOIL SHALL CONTAIN A MINIMUM OF 3% ORGANIC MATERIAL.

 TOPSOIL MUST PERCOLATE WATER AT A RATE OF 1" PER HOUR (S

PALM PLANTING - ANGLE STAKE

TOPSOIL SHALL CONTAIN A MINIMUM OF 3% ORGANIC MATERIAL.
 TOPSOIL MUST PERCOLATE WATER AT A RATE OF 1" PER HOUR (SEE ALSO DRAINAGE TESTING DETAIL FOR TREES)
 LANDSCAPE AREA SOILS SHALL BE APPROVED BY LANDSCAPE ARCHITECT/OWNER PRIOR TO PLANTING

TOPSOIL ROOTBALL 6" DIA. DRAINAGE DETAIL

DRAINAGE TESTING DETAIL

TOP OF ROOT **BARRIER 1" ABOVE** FINISHED GRADE 2" FINISHED GRADE -CURB **BELOW ADJACENT** PAVEMENT 29" MIN DEPTH ROOT BARRIER. (SEE SPEC.) TAMP SOIL ADJACENT TO **ROOT BARRIERS TO** STABILIZE SO THAT IRRIGATION FLOWS DIRECTLY THROUGH THE ROOT BALL. 29" MIN DEPTH **EXISTING SOIL** ROOT BARRIER. (SEE SPEC.)


SPECIAL APPLICATIONS ROOT BARRIER DETAIL NOT TO SCALE

NOTES:

1- ROOT BARRIER SHALL BE "BIO-BARRIER 29" DEPTH OR APPROVED EQUAL.
2- ROOT BARRIER SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.

SHRUB PLANTING

NOT TO SCALE

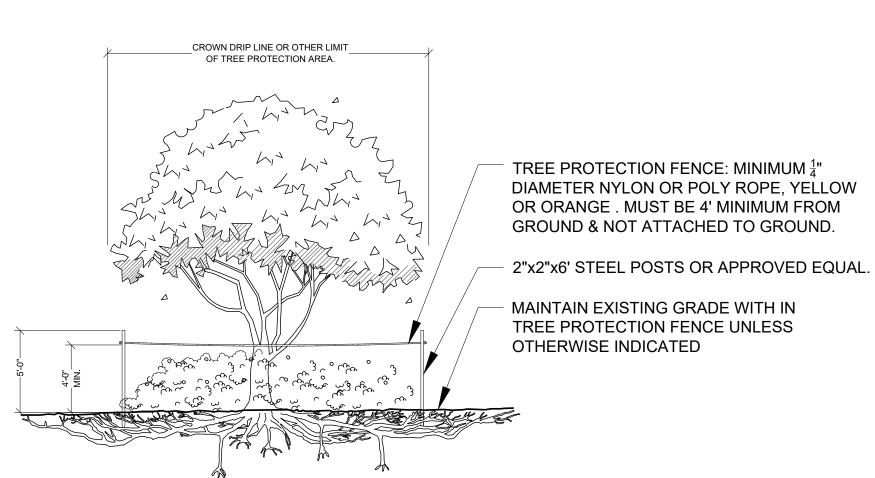

TREE PROTECTION BARRICADE NOT TO SCALE

NOTES:

NO PRUNING SHALL BE PERFORMED EXCEPT BY APPROVED ARBORIST.NO EQUIPMENT SHALL OPERATE INSIDE THE PROTECTIVE FENCING INCLUDING DURING


FENCE INSTALLATION AND REMOVAL.

DRAINAGE TESTING/DRAINAGE CHANNEL REQUIREMENTS.

PRIOR TO PLANTING, ALL PLANTING PITS SELECTED FOR TESTING SHALL BE TESTED IN THE FOLLOWING MANNER.

- A. DIG EACH PLANTING PIT TO THE MINIMUM SPECIFIED SIZE.
- B. FILL PLANTING PIT WITH TWELVE INCHES (12") OF WATER. IF THE WATER LEVEL DROPS FOUR (4") OR MORE WITHIN FOUR (4) HOURS, THE DRAINAGE IS SUFFICIENT AND A DRAINAGE CHANNEL IS NOT REQUIRED. IF THE WATER LEVEL DROPS LESS THAN FOUR INCHES (4") WITHIN THE FOUR (4) HOUR PERIOD, A DRAINAGE CHANNEL IS REQUIRED.
- C. WHERE REQUIRED, THE DRAINAGE CHANNEL MUST EXTEND DOWN THROUGH THE NON POROUS SOIL AND INTO POROUS SOIL. (SEE DETAIL)
- D. ALL MATERIAL REMOVED FROM THE DRAINAGE CHANNEL SHALL BE DISCARDED.
 - WHEN BACKFILLING PLANTING PITS WITH NATIVE TOPSOIL, CARE MUST BE TAKEN TO KEEP THE CONSISTENCY OF THE SOIL MIX THE SAME THROUGHOUT THE PLANTING PIT AND DRAINAGE CHANNEL.



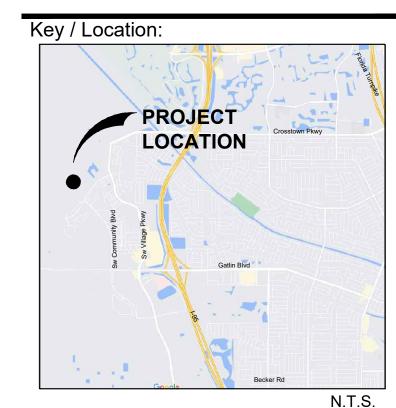

Project Team:

Mattamy Homes, LLC.
r: 1500 Gateway Blvd, Suite 220
Boynton Beach, FL 33426

Vero Beach, FL 32960

Planner / Lucido & Associates scape Architect: 701 E Ocean Boulevard Stuart, FL 34994

Engineer: Kimley Horn
445 24th Street, Suite 200

Surveyor: Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Tradition Regional Park


Port St. Lucie, FL

Landscape Details

City of Port St. Lucie P21-116

PSLUD No. 5410

Date By Description
05.18.21 PG 1st Submittal
04.06.22 SAW Resubmittal
07.06.2022 SAW Resubmittal
07.19.2023 SAW Resubmittal
08.30.2023 SAW Resubmittal

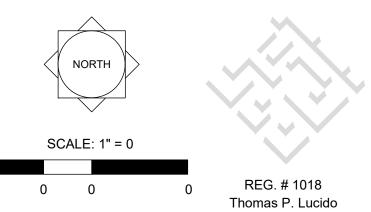

Designer KV Sheet

Manager SG

Project Number 20-276.17

Municipal Number P21-116

cipal Number 20-276.17 LA=9

cipal Number P21-116

puter File 20-276.17 Tradition Regional Park- Landscape-re

LANDSCAPE SPECIFICATIONS

PART 1: GENERAL CONDITIONS

PART 1:	GENERAL CONDITIONS	
1.01 A.	SCOPE: The landscape contract includes the supplying and planting of all trees, shrubs, vines, and ground cover together with all necessary labor, equipment, tools and materials needed for the successful completion, execution and maintenance of the landscape plans.	2.02 A.
1.02 A.	AGENCY STANDARDS: Grades and standards of plant materials to be used shall be true to name, size, condition and graded Florida #1 or better as stated in: Grades and Standards of Florida Plant Materials published by the State of Florida Department of Agriculture, Tallahassee, Florida.	2.03
1.03 A.	SITE EXAMINATION: The Landscape Contractor shall personally examine the site and fully acquaint him/herlself with all of the existing conditions in order that no mis-understanding may afterwards arise as to the character or extent of the work to be performed, and, additionally, in order to acquaint him/herself with all precautions to be taken in order to avoid injury to property or persons. No additional compensation will be granted because of any unusual difficulties which may be encountered in the execution or maintenance of any portion of the work.	A. B.
1.04 A.	ERRORS AND OMISSIONS: The plant list is a part of the drawings and is furnished as a convenience. The plant list indicates the name, size and quantities of specific plant materials as called for and is located on the drawings. The Landscape Contractor is responsible for his/her own quantity count, and any discrepancy between drawings and plant list shall be considered as correct on the drawings.	C.
B.	The Landscape Contractor shall not take advantage of errors or omissions in the specifications or contract drawings. Full instruction will be given if such errors are discovered. Upon the discovery of any discrepancies in, or omissions from the drawings or documents, or should the Landscape Contractor be in doubt as to their meaning, the Landscape Architect shall be notified and will determine the actions necessary to each query.	2.04 A.
C.	If plans and specifications are found to disagree after the contract is awarded, the Landscape Architect shall be the judge as to which was intended.	В. С.
1.05 A.	EXECUTION OF THE WORK: The Landscape Contractor shall have his labor crews controlled and directed by a Foreman well versed in plant materials, planting methods, reading plans, and coordination between job and nursery in order to execute installation correctly and in a timely manner.	D. 2.05
B.	The Landscape Contractor shall provide a competent English-speaking Foreman on the project at all times, who shall be fully authorized as the Contractor's agent on the work. The Foreman shall be capable of reading and thoroughly understanding the Plans, Specifications and other Contract Documents. If the Superintendent is deemed incompetent by the Landscape Architect, he (the superintendent) shall be immediately replaced.	A. 2.06 A.
C.	The Landscape Contractor shall be available for any meetings with the Owner and/or Landscape Architect during implementation of the job. Any additional work or changes required as a result of failure to communicate with the Owner or Landscape Architect during implementation will be the responsibility of the Landscape Contractor.	
1.06 A.	PROTECTION OF PUBLIC AND PROPERTY: The Landscape Contractor shall protect all materials and work against injury from any cause and shall provide and maintain all necessary safeguards for the protection of the public. He shall be held responsible for any damage or injury to persons or property which may occur as a result of his fault or negligence in the execution of the work, i.e. damage to underground pipes or cables.	В.
1.07 A.	CHANGES AND EXTRAS: The Contractor shall not start work on any changes or "extras" in the project until a written agreement setting forth the adjusted prices has been executed by the Owner and the Contractor. Any work performed on changes or "extras" prior to execution of a written agreement may or may not be compensated for by the Owner at his discretion.	
1.08	GUARANTEE: The Landscape Contractor shall furnish a written guarantee warranting all materials, workmanship and plant materials, except sod, for a period of 18 MONTHS from the time of completion and acceptance by the Landscape Architect and Owner. Sod shall be guaranteed to 90 calendar days after acceptance by the Landscape Architect and Owner. All plant material shall be alive and in satisfactory condition and growth for each specific kind of plant at the end of the guarantee period. The guaranteeing of plant material shall be construed to mean complete and immediate replacement with plant material of the same variety, type, size, quality and grade as that of the originally specified material. During the guarantee period it shall be the Landscape Contractor's responsibility to immediately replace any dead or unhealthy material as determined by the Landscape Architect. The guarantee will be null and void if plant material is damaged by lightning, hurricane force winds, or any other acts of God, as well as vandalism or lack of proper maintenance.	2.07 A.
В.	At the end of the specified guarantee period, any plant required under this contract that is dead or not in satisfactory condition, as determined by the Landscape Architect, shall be replaced. The Landscape Contractor shall be responsible for the full replacement cost of plant materials for the first replacement and share subsequent replacement (s) costs equally with the Owner, should the replacement plant fail to survive.	B. C.
1.09 A.	CARE AND MAINTENANCE: The Landscape Contractor shall be responsible for the care and maintenance of all plant materials and irrigation when applicable until final acceptance by the Owner or Landscape Architect.	
B. 1.10	The Owner agrees to execute the instructions for such care and maintenance. SAFETY:	
A.	It shall be the responsibility of the Landscape Contractor to protect all persons from injury and to avoid property damage. Adequate warning devices shall be placed and maintained during the progress of the work.	
B.	It shall be the contractor's responsibility to conform to all local, state, and federal safety laws and codes including the Federal Occupational Safety And Health Act (O.S.H.A.).	2.08
1.11 A.	CONTRACTOR QUALIFICATION: The Owner may require the apparent contractor (s) to qualify him/herself to be a responsible entity by furnishing any or all of the following documentary data:	A. B.
	 A financial statement showing assets and liabilities of the company current to date. A listing of not less than (3) completed projects of similar scope and nature. Permanent name and address of place of business. The number of regular employees of the organization and length of time the organization has been in business under the present 	PAR1
1.12 A.	INSURANCE AND BONDING: The contractor (s) shall submit proof of insurance for this job for the time period that the work is done. The minimum amount of insurance shall be \$300,000.00 per person and \$300,000.00 per aggregate or as required by owner and agreed to in the contract. The successful bidder shall be required to have this coverage in effect before beginning work on the site.	3.01 A.
В.	The Owner shall have the right to require the Contractor to furnish bonds covering faithful performance of the Contract and payment obligations arising thereunder as stipulated in bidding requirements or specifically required in the Contract Documents on the date of execution of the Contract.	3.02 A. B.
1.13 A.	PERMITS AND CERTIFICATES: All contractors shall secure and pay for all permits and certificates required for his/her class of work.	
PART 2:	MATERIALS	3.03 A.
2.01 A.	PLANT MATERIALS: A complete list of plants is shown on the drawings, including a schedule of quantities, sizes, and such other requirements deemed necessary. In the event discrepancies occur, the specifications on the drawings shall govern.	В. С.
В.	Substitutions: Substitutions of plant materials or changes in size or spacing of materials will be permitted ONLY upon written authorization by the Owner or the Landscape Architect. If plant material is not of sufficient size to meet applicable codes, a letter of variance from the appropriate agency must be obtained by the Contractor prior to issuance of any change order. If material of smaller size is to be accepted, the quantity of material shall be increased, at no additional cost to the Owner, to meet the intent of the	D.
C.	drawings. All plant materials shall have a habit of growth that is normal for the species and shall be healthy, vigorous and equal to or exceed the measurements specified in the plant list, which are the minimum acceptable sizes. Plants shall be measured before pruning with branches in normal position. Any necessary pruning shall be done at the time of planting.	E. F.
D.	All plant materials shall be nursery grown, unless otherwise noted, Florida #1 or better and shall comply with all required inspections, grading standards and plant regulations as set forth by the Florida Department of Agriculture's Grades and Standards for Nursery Plants, most current addition and Grades and Standards for Nursery Plants, most current addition.	
E.	Plants that do not have the normal balance of height and spread typical for the respective plant shall not be acceptable.	G.

The Landscape Contractor shall install each plant to display its best side. Adjustments may be required if plants are not installed

properly and/or approved by the Landscape Architect at no additional cost to owner.

2.02	INCLESTION	
A.	The Landscape Architect and Owner may inspect trees and shrubs at place of growth or at site before planting, for compliance with requirements for genus, species, variety, size and quality. The Landscape Architect and Owner retain the right to further inspect trees and shrubs for size and condition of balls and root systems, insects, injuries and latent defects, and to reject unsatisfactory or defective material at any time during progress of work. Rejected plant materials shall be immediately removed from project site.	J.
2.03 A.	PROTECTION OF PLANT MATERIALS: Balled and burlapped plants (B & B) shall be dug with firm natural balls of earth of sufficient diameter and depth to encompass the fibrous and feeding root system necessary for full recovery of the plant. Balls shall be firmly wrapped with burlap similar materials and bound with cord, rope, or wire mesh. All collected plants shall be balled and burlapped.	K. L.
B.	Plants with broken, damaged or insufficient rootballs will be rejected.	3.0 A.
C.	All plant material shall be protected from possible bark injury or breakage of branches. All plants transported by open trucks shall be adequately covered to prevent windburn, drying or damage to plants.	Λ.
D.	Plants which cannot be planted immediately on delivery to the site shall be covered with moist soil, mulch or other protection from the drying of wind and sun. All plants shall be watered as necessary by the Landscape Contractor until planted.	В.
2.04 A.	STORAGE All plant materials shall be stored on the site in designated areas, specified by the Landscape Architect or Owner's agent.	C. D.
В.	No plant material shall be stored longer than seventy-two (72) hours unless approved by Landscape Architect and/or owner.	3.0
C.	The Landscape Architect reserves the right to reject any plant materials not in conformance with these specifications.	A.
D.	All rejected material shall be immediately removed from the site and replaced with acceptable material at no cost to the Owner.	
2.05 A.	PROTECTION DURING PLANTING: Trees moved by winch or crane shall be thoroughly protected from chain marks, girdling or bark slippage by means of burlap, wood battens or other approved methods. Battens shall NOT be attached to the tree with nails	B. C.
2.06 A.	TOP SOIL: Planting soil for all plantings shall consist of topsoil and be natural, friable, fertile, fine loamy soil possessing characteristics of representative topsoil in the vicinity of the project site that produces heavy growth. Topsoil shall have a PH range of 5.5-7.4, free from subsoil, weeds, litter, sods, clay, stones, stumps, roots, trash, herbicides, toxic substances, or any other material which may be harmful	D.
	to plant growth, or hinder planting operations. Topsoil shall contain a minimum of 3% organic material. Topsoil must percolate water at a rate of 1" per hour (See also drainage testing detail for trees)	3. A.
В.	Landscape Area Preparation. The intent of this section is to ensure a healthy growing environment for all planting material in <u>all</u> landscaped areas. Landscape Contractor to examine existing soils prior to planting to ensure conformance to <u>all</u> definitions of "Topsoil" (seeLandscape Area Preparation Detail); In addition, a 3" layer of high organic (min 40%) potting soil shall be added to the topsoil and mixed in at time of planting. <i>East Coast Recycling Inc.</i> is a recommended source for imported Topsoil (if needed) as well as the top 3" layer of potting soil.	B.
	Existing soils must meet all definitions of 'Topsoil' as described above in all planting areas throughout the site. If existing soils do	3.
	not meet all definitions of Topsoil, please refer to the 'Landscape Area Preparation' detail. Examination may require existing soils to be tested by an accredited testing laboratory. Should a soil test be necessary, Contractor shall contact soil testing lab directly to	A. B.
	confirm such lab's soil collection and transmittal protocol; all costs if any shall be borne by the Contractor. Contractor shall provide to Landscape Architect for review the results of the soil test if conducted. Contractor shall schedule an on-site meeting with Landscape Architect to review existing and/or imported soils prior to planting. The Landscape Area Preparation is the responsibility of the Landscape Contractor. He/she shall except all responsibility of planting soils and shall honor all guarantee items in section 1.08.	С.
2.07 A.	FERTILIZER: Commercial fertilizer shall comply with the state and local fertilizer laws. Nitrogen shall not be less than 40% from organic source. Inorganic chemical nitrogen shall not be derived from the sodium form of nitrate. Fertilizers shall be delivered to the site in unopened original containers, each bearing the manufacturer's guaranteed analysis. Any fertilizer that becomes caked or otherwise damaged shall be rejected.	D. E.
В.	Thoroughly mixed 3 lbs. of commercial fertilizer to each cubic yard of planting soil.	F.
C.	Tabletized fertilizer shall be Agriform planting tablets 20-10-5 formula, 21 gram or equal. All trees and shrubs shall be fertilized with tabletized fertilizer as follows. While backfilling plant holes, fertilizer tablets shall be equally spaced and placed adjacent to the ball mid-way in depth in accordance with the following rates:	G.
	1 gallon container 1 tablet 3 gallon container 2 tablets 5 gallon container 3 tablets 7 gallon container 5 tablets	H. 3.0 A.
	Large tubs, wire baskets, grow bags, and balled and burlapped material shall have 1 tablet for each 1/2 inch of trunk diameter (measured 3 feet from ground) or for each foot of height or spread of larger shrub material. The Landscape Architect reserves the right to inspect and review the application of fertilizer.	B.
2.08 A.	MULCH: Mulch material shall be clean, dry, free of weeds, seeds and pests, moistened at the time of application to prevent wind displacement. Cypress &/or Red mulch is prohibited.	C. D.
B.	All trees and shrub beds shall receive 3" mulch immediately after planting and thoroughly watered. Apply 2" max on tree & palm rootballs, keep 6" away from tree & palm trunks or as required by local jurisdiction.	3.0 A.
PART 3	EXECUTION	3.
3.01 A.	DIGGING: The Landscape Contractor shall exercise care in digging and other work so as not to damage existing work, including overhead wires,	A.
	underground pipes and cables and the pipes and hydrants of watering systems. Should such overhead or underground obstructions be encountered which interfere with planting, the Owner shall be consulted and contractor will adjust the location of plants to clear such obstruction. The Contractor shall be responsible for the immediate repair of any damage caused by his work.	В.
3.02 A.	GRADING: Grading for drainage, swales, etc. to within 4 inches of the finished grade to be provided by others.	C.
B.	It shall be the responsibility of the Landscape Contractor to provide the final grading during the course of landscape installation so as to bring sod and planting areas to their proper elevations in relation to walks, paving, drain structures, and other site conditions. The site grading plan must be checked prior to installation of sod to insure that drainage and other conditions will NOT be modified.	D. E.
3.03 _A	PLANTING: Planting shall take place during favorable weather conditions	3.
A. B.	Planting shall take place during favorable weather conditions. The Contractor shall call for utility locates and ascertain the location of all utilities and easements so proper precautions can be taken	Α.
	not to damage or encroach on them.	В.
C.	Tree Planting shall be located where it is shown on the plan. No planting holes shall be dug until the proposed locations have been staked on the ground by the Contractor.	
D.	Excavation of holes shall extend to the required subgrades as specified on the planting diagrams located in the landscape plans. Plant pits shall be circular in outline and shall have a profile which conforms to the aforementioned "Tree and Shrub Planting Diagrams".	C.
E.	A representative number of planting pits (a minimum of one in every 25 feet throughout the entire site) shall be tested for proper drainage. See Landscape Details for complete testing methods and requirements.	D.
F.	Planting pits shall be excavated to the following dimensions and backfilled with Topsoil- see Landscape Area Preparation Detail; 1 Gallon material (1 gal.): 12" x 12" x 12" min. 3 Gallon material (3 gal.): 20" x 20" x 18" min.	E.

3 Gallon material (3 gal.): 20" x 20" x 18" min. Lerio material (7 gal.): 30" x 30" x 24" min.

Field grown material and trees: 1-1/2 times width of ball and depth of ball plus 12" min.

Each plant shall be planted in an individual hole as specified for trees, shrubs, and vines.

drain inlets and swales and approved by Landscape Architect or owner's rep.

No planting or laying of sod shall be initiated until the area has been cleaned of existing sod or other plant materials, rough grass,

weeds, debris, stones etc. and the ground has been brought to an even grade, with positive drainage away from buildings and towards

INSPECTION

All plants shall be set to ultimate finished grade. No filling will be permitted around trunks or stems. All ropes, wire, stakes, etc., shall be removed from sides and top of the ball and removed from hole before filling in. All flagging ribbon shall be removed from trees and shrubs before planting. Excess excavation (fill) from all holes shall be removed from the site, at no additional expense to Owner. All palms shall be backfilled with sand, thoroughly washed in during planting operations and with a shallow saucer depression left at the soil line for future watering's. Saucer areas shall be top-dressed two (2") inches deep with topsoil raked and left in a neat, clean PRUNING: 3.04 Remove dead and broken branches from all plant material. Prune to retain typical growth habit of individual plants with as much height and spread as possible in a manner which will preserve the plant's natural character. Make all cuts with sharp instruments flush with trunk or adjacent branch, in such a manner as to insure elimination of stubs. Cuts made at right angles to line of growth will not be permitted. Trees shall not be poled or topped. Remove all trimming from site. 3.05 **GUYING:** All trees over six (6') feet in height shall, immediately after setting to proper grade, be guyed with three sets of two strands, No. 12 gauge malleable galvanized iron, in tripod fashion. See Detail. Wires shall not come in direct contact with the tree but shall be covered with an approved protection device at all contact points. Wires shall be fastened in such a manner as to avoid pulling crotches apart. Stake & Brace all trees larger than 12' oa. See detail. Stakes shall be 2" x 2" lumber of sufficient length to satisfactorily support each Turnbuckles for guying trees shall be galvanized or cadmium plated and shall be of adequate size and strength to properly maintain tight guy wires. Each plant or tree shall be thoroughly watered in after planting. Watering of all newly installed plant materials shall be the responsibility of the Landscape Contractor until final acceptance by the Landscape Architect. Prior to installing any irrigation system components, the contractor shall obtain a water sample from the proposed water supply and conduct a particle size and count analysis on the sample using the services of a reputable lab certified in such analysis. Submit the test results to the owner/owner's representative for review and approval. Do not proceed further with system installation until given written approval to do so. The Landscape Contractor shall sod all areas indicated on the drawings. It shall be the responsibility of the Landscape Contractor to fine grade all landscape areas, eliminating all bumps, depressions, sticks, stones, and other debris. The sod shall be firm, tough texture, having a compacted growth of grass with good root development. It shall contain no noxious weeds, or any other objectionable vegetation, fungus, insects, or disease. The soil embedded in the sod shall be good clean earth, free from stones and debris. Before being cut and lifted, the sod shall have been mowed at least three times with a lawn mower, with the final mowing not more than seven days before the sod is cut. The sod shall be carefully cut into uniform dimensions. 6-6-6 fertilizer with all trace elements is to be applied at the rate of 40 lbs. per 1,000 sq. ft. prior to laying sod.

Solid sod shall be laid with closely abutting, staggered joints with a tamped or rolled, even surface.

The finished level of all sod areas after settlement shall be one (1") inch below the top of abutting curbs, walks, paving and wood borders to allow for building turf.

If in the opinion of the Landscape Architect, top dressing is necessary after rolling, clean yellow sand will be evenly applied over the entire surface and thoroughly washed in.

3.08 The Landscape Contractor shall remove all vegetation and rocks larger than (1") in diameter from areas to be seeded, scarify the area, then apply fertilizer at a rate of 500 lbs. per acre.

Roll immediately after seeding with a minimum 500 pound roller, then apply straw mulch at the rate of 2,500 pounds per acre.

Application: Argentine Bahia Grass seed- 200 Pounds per acre mixed with common hulled Bermuda seed- 30 lbs. per acre. All other seed mixtures shall be applied per the manufacturer's instructions.

Apply fertilizer at the rate of 150 lbs. per acre 45-60 days after seeding.

3.09

The contractor shall at all times keep the premises free from accumulations of waste materials or rubbish caused by his employees or work. He shall leave all paved areas "broom clean" when completed with his work.

MAINTENANCE:

Maintenance shall begin immediately after each plant is installed and shall continue until all planting has been accepted by the Owner or Landscape Architect. Maintenance shall include watering, weeding, removal of dead materials, resetting plants to proper grades or upright positions, spraying, restoration of planting saucer and/or any other necessary operations.

Proper protection to lawn areas shall be provided and any damage resulting from planting operations shall be repaired promptly.

Replacement of plants during the maintenance period shall be the responsibility of the Contractor, excluding vandalism or damage on the part of others, lighting, or hurricane force winds, until final acceptance.

In the event that weeds or other undesirable vegetation become prevalent, it shall be the Contractor's responsibility to remove them.

Trees or other plant material which fall or are blown over during the maintenance period will be reset by the Contractor at no additional expense to the Owner, the only exception being hurricane force winds.

COMPLETION, INSPECTION AND ACCEPTANCE: Completion of the work shall mean the full and exact compliance and conformity with the provisions expressed or implied in the

Drawings and in the Specifications, including the complete removal of all trash, debris, soil or other waste created by the Landscape


Inspection of work to determine completion of contract, exclusive of the possible replacement of plants, will be made by the Owner and/or Landscape Architect at the conclusion of all planting and at the request of the Landscape Contractor.

All plant material shall be alive and in good growing condition for each specified kind of plant at the time of acceptance. The rating of each plant according to Florida Grades and Standards shall be equal to or better than that called for on the plans and in these Specifications at the time of final inspection and acceptance.

After inspection, the Landscape Contractor will be notified by the Owner of the acceptance of all plant material and workmanship, exclusive of the possible replacement of plants subject to guarantee.

All trees & shrubs shall be straight and in correct position per the landscape plans, details and specifications. All nursery, shipping and identification tags & ribbons shall be removed from trees & shrubs immediately after planting.

701 SE Ocean Blvd., Stuart, Florida 34994 (772) 220-2100, Fax (772) 223-0220

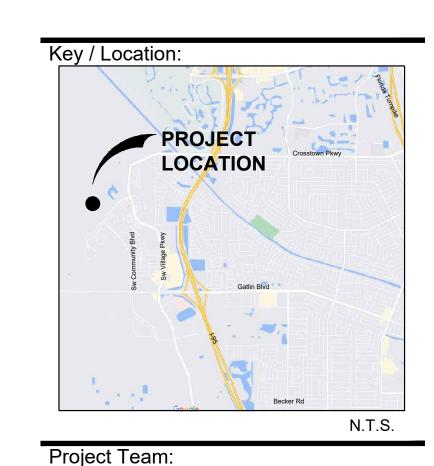

Mattamy Homes, LLC. **Property Owner:** 1500 Gateway Blvd, Suite 220 Boynton Beach, FL 33426

701 E Ocean Boulevard Landscape Architect: Stuart, FL 34994

Land Planner /

445 24th Street, Suite 200 Vero Beach, FL 32960

> Caulfield & Wheeler Inc. 410 S.E. Port St. Lucie Blvd. Port St. Lucie, Florida 34984

Kimlev Horn

Lucido & Associates

Tradition Regional Park

Port St. Lucie, FL Landscape Specifications

City of Port St. Lucie P21-116 PSLUD No. 5410

Date	By	Description
05.18.21	PĞ	1st Submittal
04.06.22	SAW	Resubmittal
07.06.2022	SAW	Resubmittal
07.19.2023	SAW	Resubmittal
08.30.2023	SAW	Resubmittal



REG. # 1018 Thomas P. Lucido

ΚV Designer Manager 20-276.17 Project Number Municipal Number P21-116

20-276.17 Tradition Regional Park- Landscape-re