










Date	Revision
6.19.2017	
8.2.2017	

LANDSCAPE REQUIREMENTS







	MINIMUM	
DROUGHT TOLERANT PLANT MATERIALS	90%	ALL PROVIDED
NATIVE TREE SPECIES	50%	ALL PROVIDED
NATIVE SHRUB SPECIES	25%	ALL PROVIDED
FLOWERING TREES	20%	ALL PROVIDED
EVERGREEN TREES IN LANDSCAPE ISLANDS	75%	ALL PROVIDED
SCD AREAS	<50% SITE	ALL PROVIDED
PALM TREE TOTAL	<50%	ALL PROVIDED
TREE SPECIES MIX	4 SPECIES	ALL PROVIDED

TREE KEY

-  ACCENT PLANT
-  SABAL PALM
-  LAGUSTRUM TREE (SMALL)
-  CRAPE MYRTLE (SMALL)
-  MAHOGANY TREE (CANOPY)
-  LIVE OAK TREE (CANOPY)
-  MAGNOLIA TREE (CANOPY)
-  LAUREL OAK TREE (CANOPY)
-  DAHOON HOLLY (MEDIUM)

LANDSCAPE NOTES

ALL SHRUBS TO BE PLANTED 2' O.C.
 DAHOON HOLLY IS ACCEPTED BY FPL FOR PLANTING UNDER UTILITY LINES.
 ALL BACKFLOW PREVENTERS AND GROUND MOUNTED MECHANICAL EQUIPMENT TO BE SCREENED WITH SHRUBS.
 NO TREE SHALL BE PLANTED CLOSER THAN 5' TO PAVEMENT OR CONCRETE AS MEASURED FROM CENTER OF TRUNK.
 MAINTAIN 10' SEPARATION BETWEEN TREES AND UTILITIES.

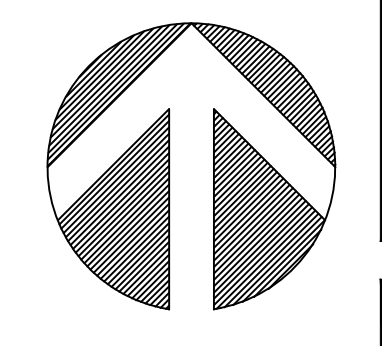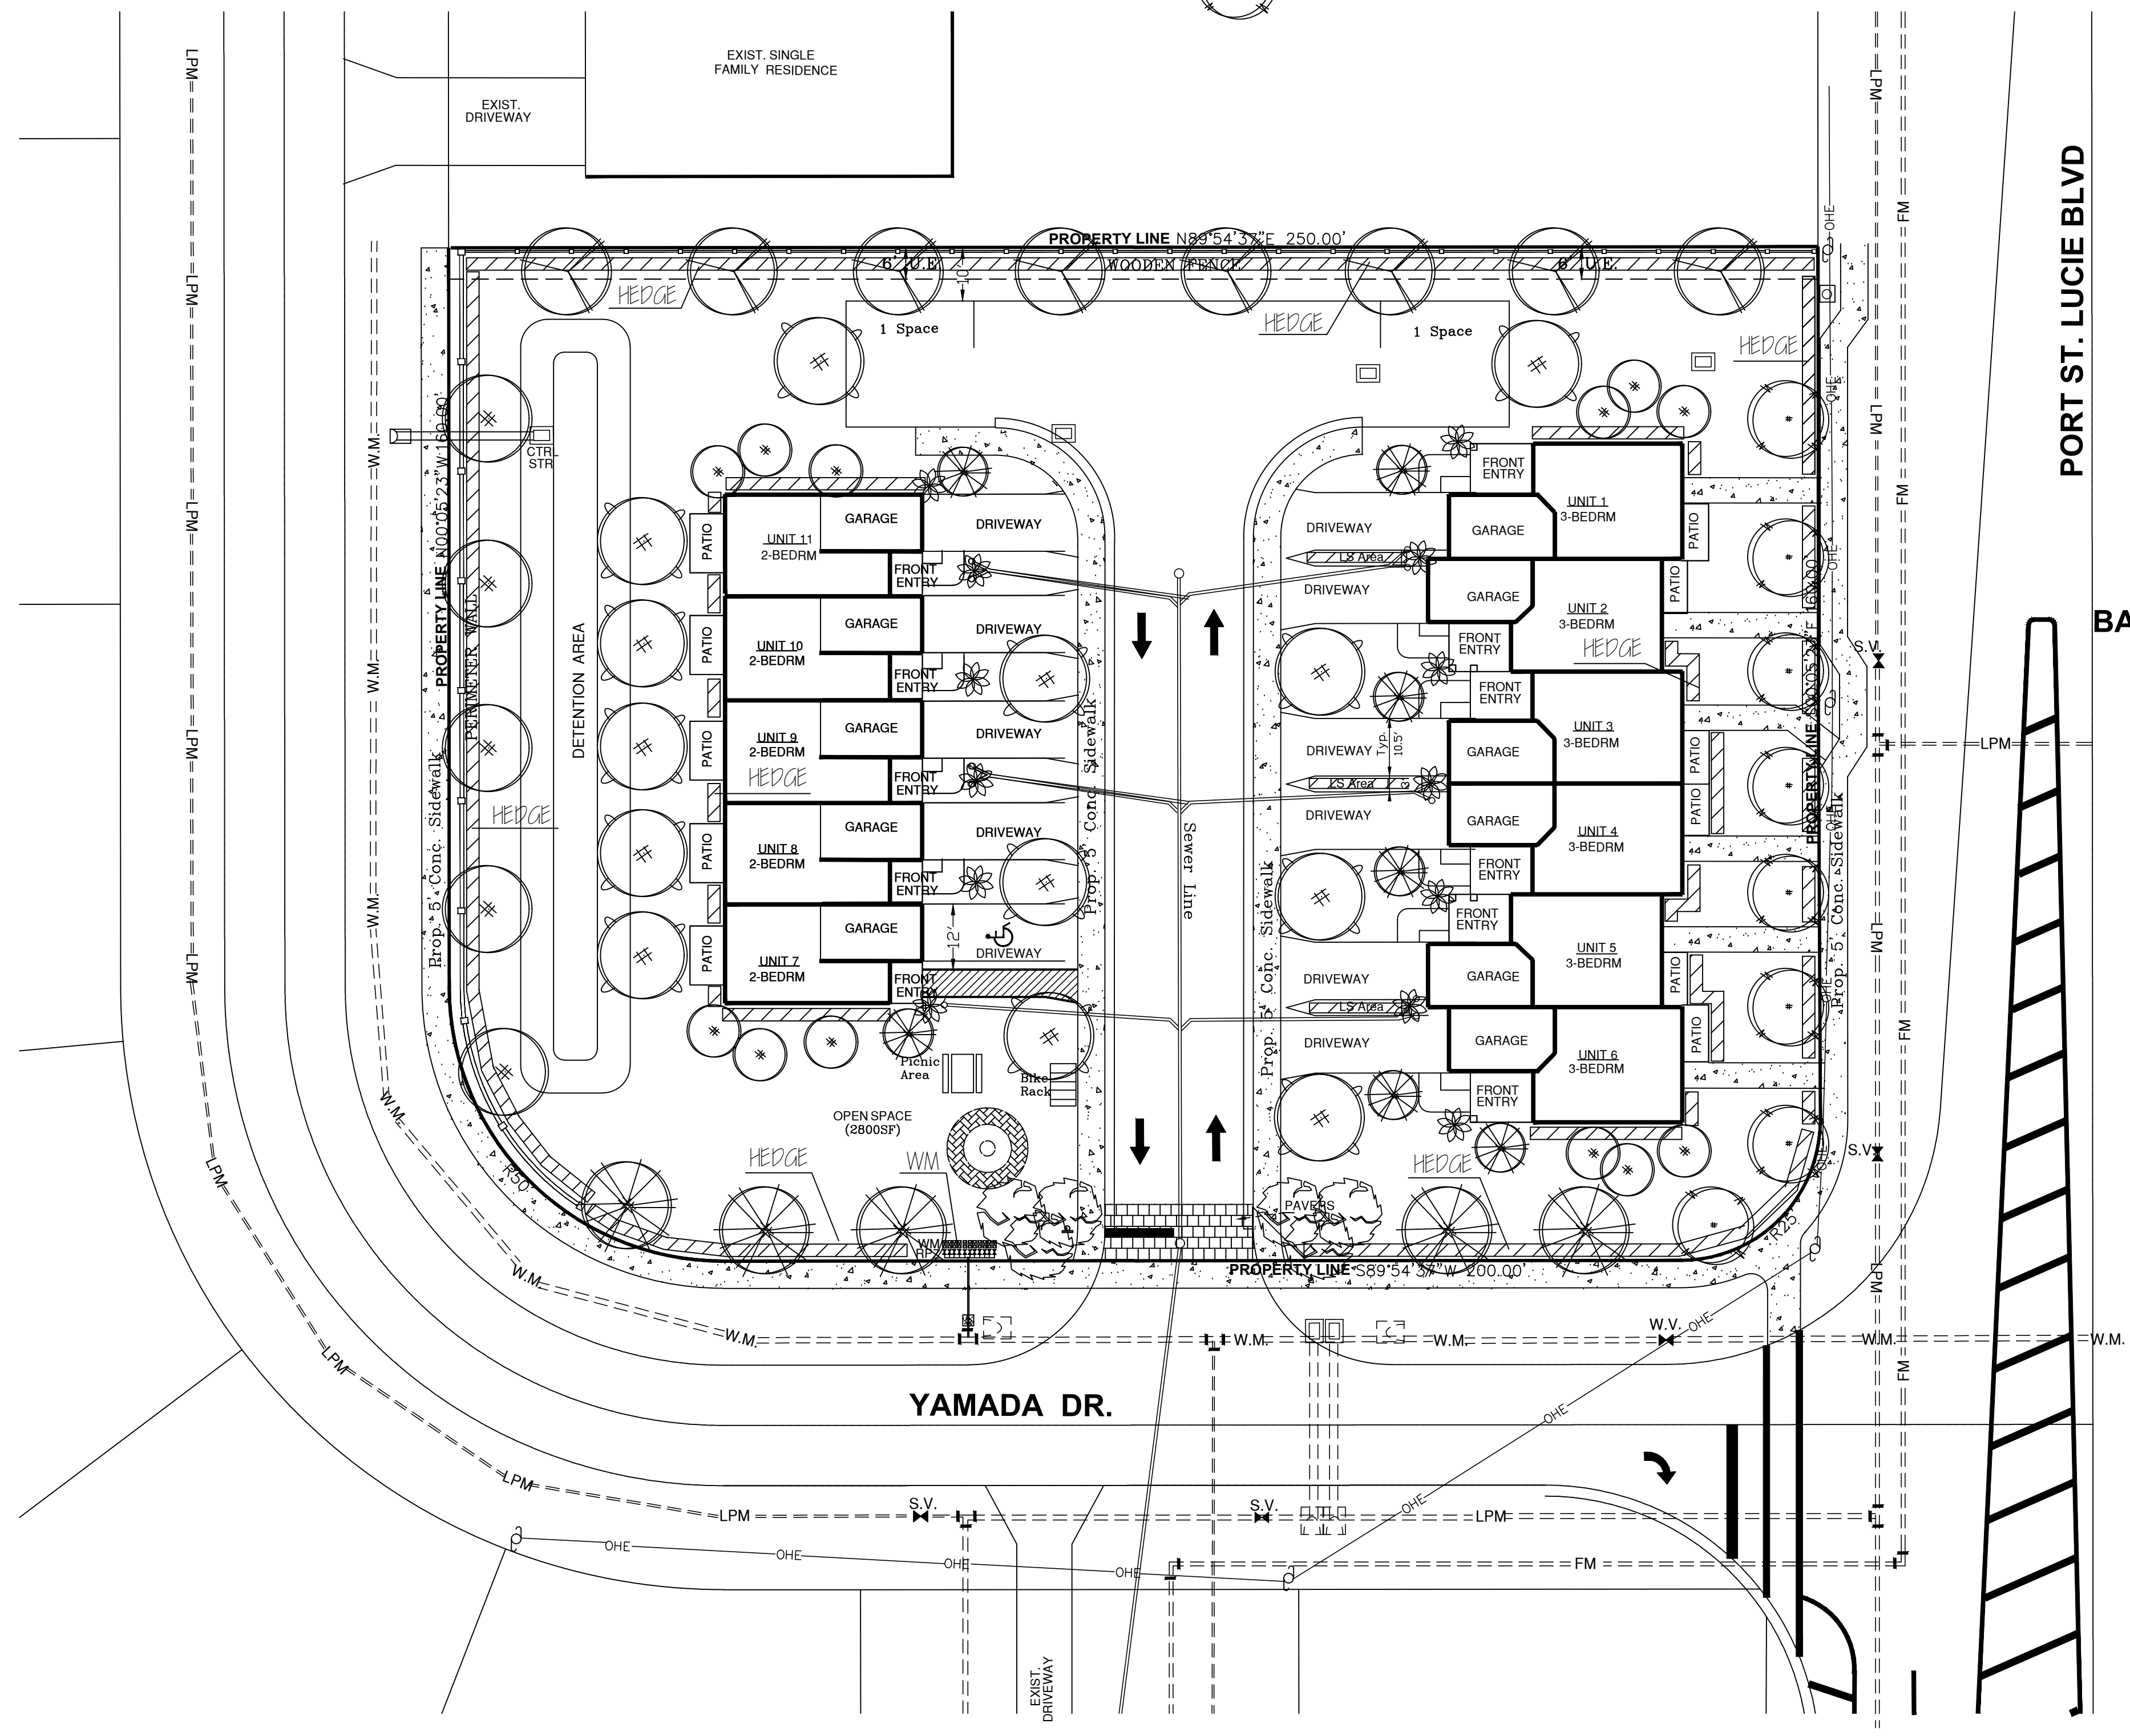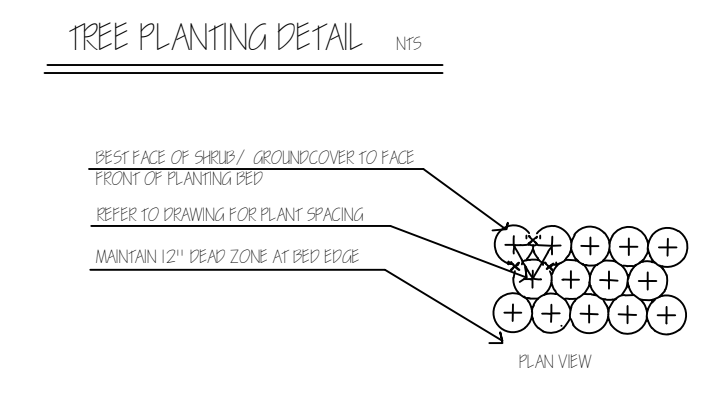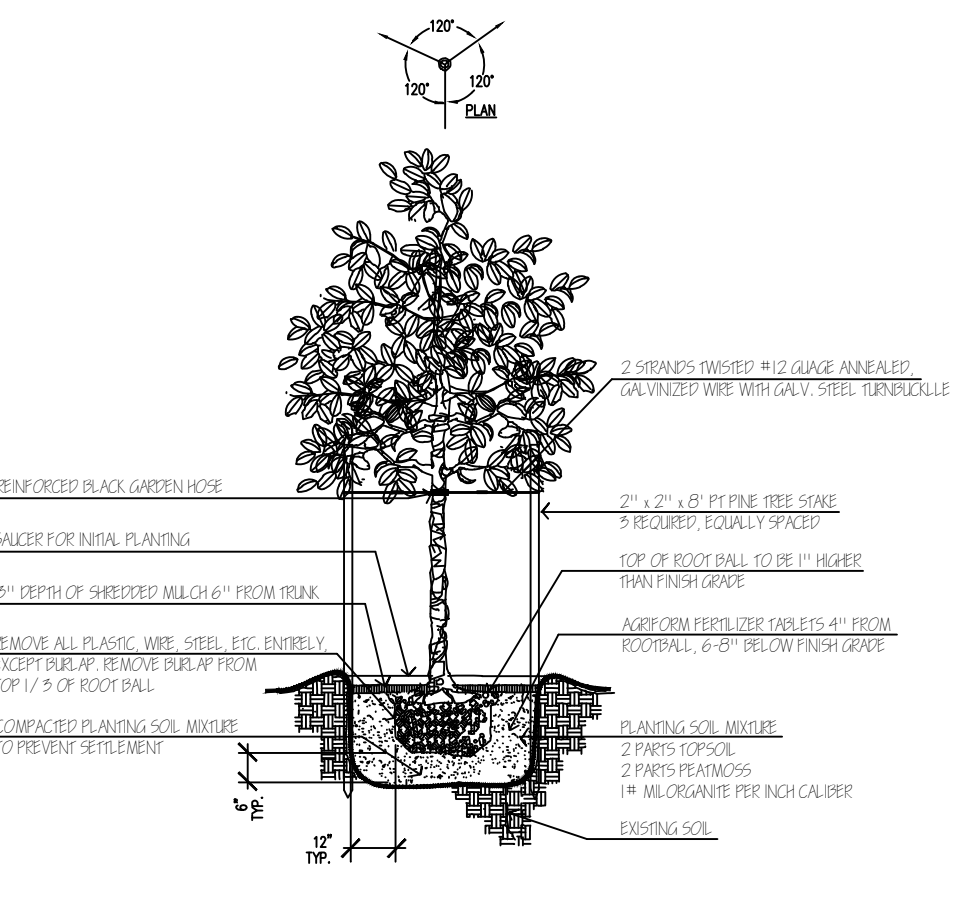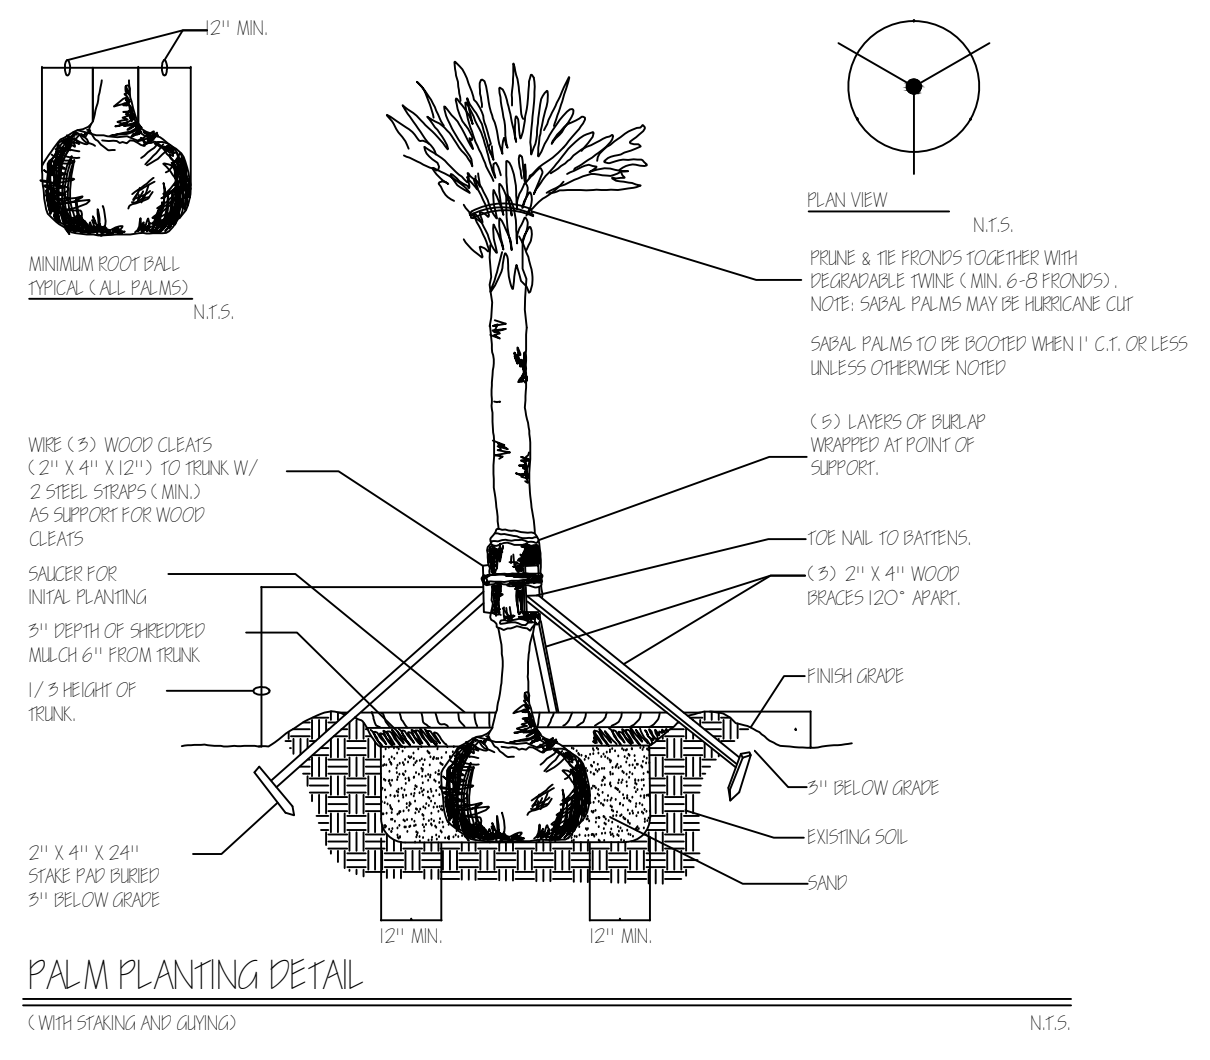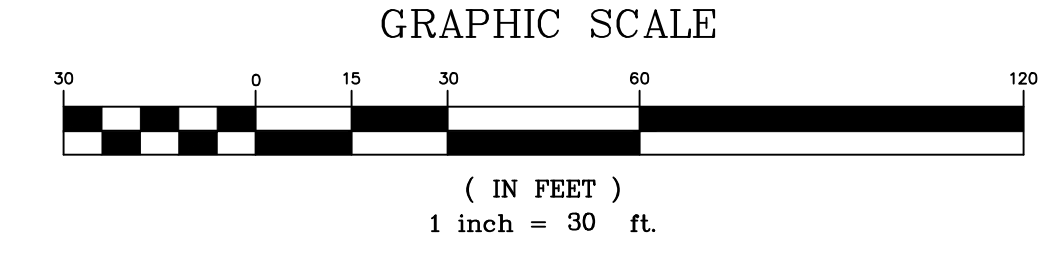

ELECTRONIC SEAL AFFIXED BY AUTHOR 8.2.2017

William A. Flint, III
 Landscape Architect
 Stuart, FL
 FL Reg. #941
 wflint3@gmail.com

LAS PALMAS TOWN HOMES
 PORT ST. LUCIE BLVD.
 PORT ST. LUCIE, FL

DATE: 6.17.2017
 DRAWN: WAF
 CHECKED:
 SCALE: 1" = 20'
 PROJECT NO. 17-099

